


PUR C-track cable · For the highest requirements

LÜTZE SUPERFLEX® PLUS N PUR



halogenfree

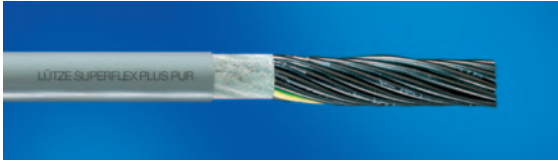

Application

- Machine and device construction, transport and conveyor technology
- Through full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely harsh operating conditions, aggressive coolants and lubricants
- Especially for industrial environments, in machines, plant and device construction

Properties

- Flame-retardant, self-extinguishing
- halogen-free, no corrosive gases
- Very good alternating bending strength
- Good pressure and roll-over resistance
- Low adhesion, abrasion-proof, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weathering, ozone and UV resistant (normal lighting conditions)
- Good industrial- and salt water resistance
- Excellent coolant and lubricant resistance
- Widely resistant to oils, greases, alcohol-free benzines and kerosene
- Free from paint wetting disruptive substances (LABS-free), RoHS-compliant

Technical data

UL approval	300 V 80 °C (0.5 – 1.0 mm ²) 600 V 80 °C (starting with 1.5 mm ²)
Voltage	
U ₀ /U	300/500 V
UL	300 V (0,5 – 1,0 mm ²) 600 V (ab 1,5 mm ²)
Test voltage	
3000 V	0,5 mm – 1,0 mm ²
6000 V	from 1,5 mm ²
Isolation resistance	min. 100 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	Cable diameter × 7,5
fixed	Cable diameter × 4
Radiation-resistance	5×10 ⁷ cJ/kg
Burning behaviour	Flame-retardant according to VDE 0482 T 265-2-1; UL 1581 section VW-1 Flame-Test; CSA FT 1
Halogen-free	according to DIN EN 50264-1; EN 50267-2-1 and EN 60684-2

Design

- Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
- Special TPE conductor insulation, UL qualified
- Conductors black with white number print according to DIN EN 50334
- Ground conductor green/yellow according to DIN EN 50334 in the top layer
- Conductors twisted without mechanical stress, layer pitch optimised
- Non-woven material over the stranded cable
- Full polyurethane jacket, matt, adhesion-free surface
- Jacket colour grey RAL 7001

Part-No.	Number of strands/cross-section	Outer-Ø approx. mm	Weight kg/100 m	Cu-Index kg/100 m
0.5 mm²				
113431	2×0,5 OZ	4.7	2.7	1.0
113441	3×0,5	4.9	3.2	1.4
113442	4×0,5	5.2	4.1	1.9
113443	5×0,5	5.6	5.5	2.4
113444	7×0,5	6.6	6.4	3.3
113446	12×0,5	8.0	9.6	5.7
113438	18×0,5	9.0	13.8	8.6
113447	25×0,5	10.8	18.2	12.1
0.75 mm²				
113432	2×0,75 OZ	5.5	5.4	1.4
113445	3×0,75	5.6	5.7	2.2
113439	3×0,75 OZ	5.6	5.7	2.2
113435	4×0,75	6.1	6.1	2.9
113422	5×0,75	6.5	8.5	3.6
113437	7×0,75	7.8	9.0	6.1
113425	12×0,75	9.1	14.0	8.6
113428	18×0,75	11.0	20.4	13.0
113448	25×0,75	13.0	27.0	18.0
1.0 mm²				
113484	2×1,0 OZ	5.8	4.7	2.0
113400	3×1,0	6.1	5.0	2.9
113433	4×1,0	6.6	7.2	4.0
113401	5×1,0	7.2	8.5	4.8
113402	7×1,0	8.7	11.5	6.7
113403	12×1,0	10.1	18.0	11.5
113404	18×1,0	11.6	27.0	17.3
113405	25×1,0	14.1	33.9	24.0
1.5 mm²				
113485	2×1,5 OZ	6.8	7.7	2.9
113406	3×1,5	8.0	7.8	4.4
113412	4×1,5	8.3	9.5	5.9
113407	5×1,5	9.1	11.5	7.4
113408	7×1,5	10.0	17.5	10.3
113409	12×1,5	12.6	26.5	17.6
113410	18×1,5	14.9	35.9	26.5
113411	25×1,5	17.6	52.0	36.9
2.5 mm²				
113483	3×2,5	9.2	12.1	7.3
113415	4×2,5	9.9	14.3	9.6
113416	5×2,5	10.7	17.5	12.0
113417	7×2,5	12.6	24.5	16.8
113426	12×2,5	15.5	39.0	28.8
113479	18×2,5	17.6	58.1	43.8

CE These products are in conformity with the EC Low Voltage Directive 73/23/EWG or 93/68/EWG respectively