





# Connections for stage equipment LS-TYPE

ENGLISH

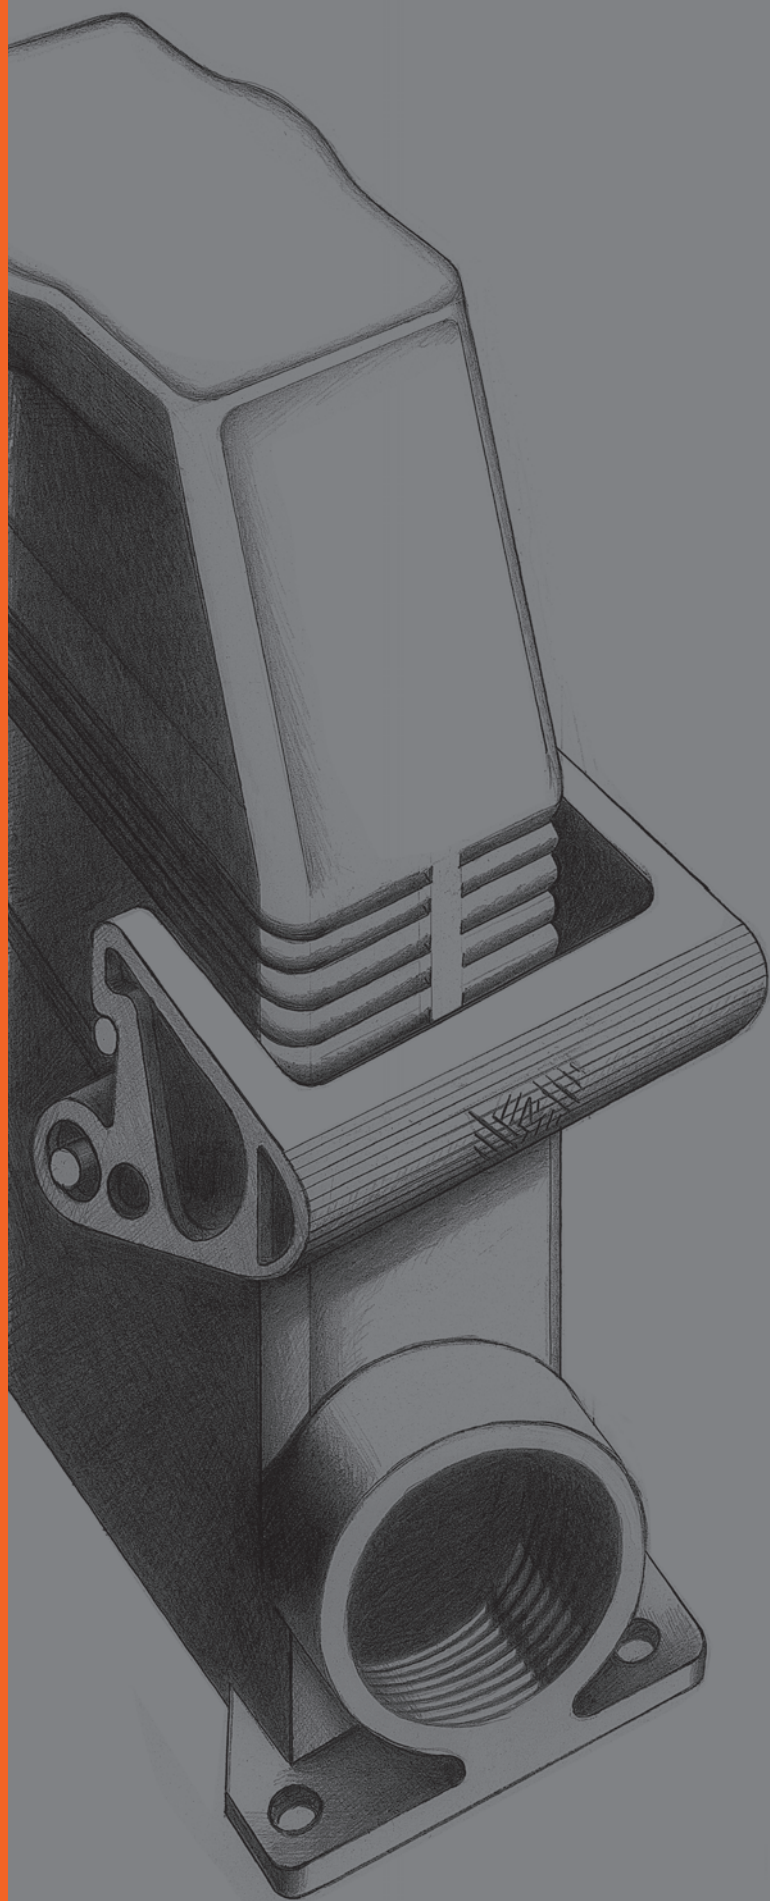

## LS-TYPE Connectors



## LS-TYPE Plugs & Sockets




The new **LS-TYPE** enclosures are the ideal solution for the entertainment industry (lighting system power supply and related mixer and dimmer panels), including theatre stages, film sets, radio and TV studios, discos, trade fair booths, concert halls and night public events, both indoors and outdoors, etc. All parts are in elegant RAL 9005 black to make them suitable for situations and locations where they should not be visible in the dark.





The enclosures are available in the standard sizes 44.27, 57.27, 77.27 and 104.27.

They are designed to accommodate all types of connector inserts (crimp, screw, or spring connections as well as the innovative Squich connection).



CRIMP



SCREW



SPRING



SQUICH

The metal enclosures maintains the same outstanding characteristics as the grey colour versions.

The overall dimensions and the fastening flanges are unchanged from the corresponding traditional versions. Therefore, the new enclosures can be used as an alternative to the classic version.

The levers are made of thermoplastic material and are easy to replace in case of breakdowns due to severe impacts during the set-up and break down of the stages, lighting systems etc.

### EASY LEVER REPLACEMENT



The suffix N identifies the new **LS-TYPE** series:

- CHIN bulkhead mounting housing with lever(s)
- MAPN surface mounting housing high construction with lever(s)
- MFVN hood with pegs top entry high construction
- MFON hood with pegs side entry high construction
- MFVN G hood with lever(s) and gasket top entry, high construction
- CHCN covers with pegs
- CHCN G covers with lever(s) and gasket

The enclosures provide IP65 degree of protection (in accordance with EN 60529) when coupled and locked through the locking levers. The range of operating ambient temperature is  $-40^{\circ}\text{C} \div +125^{\circ}\text{C}$ .



C-TYPE



LS-TYPE  
**NEW**



V-TYPE  
IP67



CENTRAL  
LEVER



EMC



T-TYPE  
Insulating



IP68



830V



JEI  
Economic



W-TYPE



180 °C



BIG

**SELECT YOUR CONNECTOR**

**ENTER YOUR APPLICATION...  
...FIND OUR PROPOSED SOLUTION**

[www.ilme.com](http://www.ilme.com)

inserts:		page
CDD .....	24 poles + ⊕	59 *
CQE .....	10 poles + ⊕	80 *
CSH .....	6 poles + ⊕	88 *
CCE .....	6 poles + ⊕	94 *
CNE, CSE, JCNE, JCSE	6 poles + ⊕ 95 and 106 *	
CSS .....	6 poles + ⊕	118 *
CTE, CTSE **)	6 poles + ⊕	126 *
MIXO .....	2 modules	160÷195 *

insert centre distance: **44 x 27 mm**

\* refer to catalogue page CN.12

### housings with single lever




### hoods with 2 pegs



description	part no.	entry M	part no.	entry M
bulkhead mounting housing, with lever	<b>CHIN 06 L</b>			
surface mounting housing, high construction, with lever	<b>MAPN 06 L32</b>	<b>32</b>		
hood with pegs, <sup>1)</sup> side entry, high construction			<b>MFON 06 L25</b>	<b>25</b>
hood with pegs, <sup>1)</sup> top entry, high construction			<b>MFVN 06 L25</b>	<b>25</b>

\*\* ) only in the CHIN 06 L enclosure

panel cut-out for bulkhead mounting housing in mm



- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

<sup>1)</sup> Hoods with height 47/53


Part nos:

- MHON 06 L25 (47 mm)
- MHVN 06 L25 (53 mm)


Can be supplied on request

dimensions in mm

#### CHIN 06 L




#### MAPN 06 L32




dimensions in mm

#### MFON 06 L25



#### MFVN 06 L25



dimensions shown are not binding  
and may be changed without notice



inserts:		page
CDD .....	24 poles + ⊕	59 *
CQE .....	10 poles + ⊕	80 *
CSH .....	6 poles + ⊕	88 *
CCE .....	6 poles + ⊕	94 *
CNE, CSE, JCNE, JCSE	6 poles + ⊕ 95 and 106	*
CSS .....	6 poles + ⊕	118 *
MIXO .....	2 modules	160÷195 *

insert centre distance: 44 x 27 mm

\* refer to catalogue page CN.12

hoods with 2 pegs



covers



description

part no. entry  
M

part no.

hood with lever and gasket,<sup>1)</sup>  
top entry, high construction


MFVN 06 LG25 25

covers with pegs  
covers with lever

CHCN 06 L  
CHCN 06 LG


dimensions in mm

MFVN 06 LG25




dimensions in mm

CHCN 06 L



CHCN 06 LG



- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

<sup>1)</sup> Hoods with height 58  
Part nos:  
- MHVN 06 LG25

Can be supplied on request



dimensions shown are not binding  
and may be changed without notice

inserts:		page
<b>CDD</b> .....	42 poles + ⊕	61 *
<b>CQE</b> .....	18 poles + ⊕	81 *
<b>CSH</b> .....	10 poles + ⊕	89 *
<b>CCE</b> .....	10 poles + ⊕	90 *
<b>CNE, CSE, JCNE, JCSE</b>	10 poles + ⊕ 97 and 107 *	
<b>CSS</b> .....	10 poles + ⊕	119 *
<b>CTE, CTSE **)</b> .....	10 poles + ⊕	127 *
<b>CMSE</b> .....	3+2 (aux) poles + ⊕	135 *
<b>CMCE</b> .....	3+2 (aux) poles + ⊕	134 *
<b>CX</b> .....	8/24 poles + ⊕	151 *
<b>MIXO</b> .....	3 modules	160+195 *

insert centre distance: **57 x 27 mm**

\* refer to catalogue page CN.12

### housings with double lever




### hoods with 4 pegs



description	part no.	entry M	part no.	entry M
bulkhead mounting housing, with 2 levers	<b>CHIN 10</b>			
surface mounting housing, high construction, with 2 levers	<b>MAPN 10.32</b>	<b>32</b>		
hood with pegs, <sup>1)</sup> side entry, high construction			<b>MFON 10.32</b>	<b>32</b>
hood with pegs, <sup>1)</sup> top entry, high construction			<b>MFVN 10.32</b>	<b>32</b>

**\*\* only in the CHIN 10 enclosure**

panel cut-out for bulkhead mounting housing in mm



- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

<sup>1)</sup> Hoods with height 52/58


Part nos:

- MHON 10.25 (52 mm)
- MHVN 10.25 (58 mm)


Can be supplied on request

dimensions in mm

#### CHIN 10

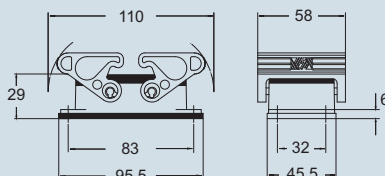


#### MAPN 10.32

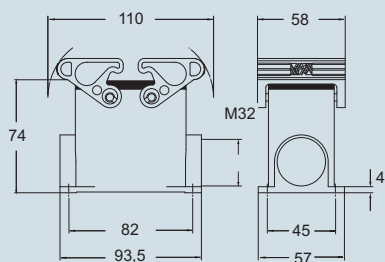


dimensions in mm

#### MFON 10.32



#### MFVN 10.32



dimensions shown are not binding  
and may be changed without notice





inserts:		page
CDD .....	42 poles + ⊕	61 *
CQE .....	18 poles + ⊕	81 *
CSH .....	10 poles + ⊕	89 *
CCE .....	10 poles + ⊕	90 *
CNE, CSE, JCNE, JCSE	10 poles + ⊕ 97 and 107	107 *
CSS .....	10 poles + ⊕	119 *
CMSE .....	3+2 (aux) poles + ⊕	135 *
CMCE .....	3+2 (aux) poles + ⊕	134 *
CX .....	8/24 poles + ⊕	151 *
MIXO .....	3 modules	160÷195 *

insert centre distance: 57 x 27 mm

\* refer to catalogue page CN.12

hoods with 4 pegs




covers



description	part no.	entry M	part no.
hood with 2 levers and gasket, <sup>1)</sup> top entry, high construction	MFVN 10 G32	32	
covers with pegs covers with 2 levers			CHCN 10 CHCN 10 G


dimensions in mm

MFVN 10 G32




dimensions in mm

CHCN 10



CHCN 10 G

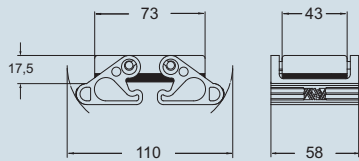

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

<sup>1)</sup> Hoods with height 63

Part nos:

- MHVN 10 G25

Can be supplied on request



dimensions shown are not binding  
and may be changed without notice

## inserts: page

CD .....	40	poles + ⊕	49+52 *
CTE, CTSE *) .....	40	poles + ⊕	56 *
CDD .....	72	poles + ⊕	62+65 *
CQE .....	32	poles + ⊕	82+84 *
CSH .....	16	poles + ⊕	90+92 *
CCE .....	16	poles + ⊕	98+102 *
CNE, CSE, JCNE, JCSE	16	poles + ⊕	99 and 108 *
CSS .....	16	poles + ⊕	120+122 *
CTE, CTSE **) .....	16	poles + ⊕	128 *
CMSE .....	6+2 (aux)	poles + ⊕	137 *
CMCE .....	6+2 (aux)	poles + ⊕	136 *
CP .....	6	poles + ⊕	149+150 *
CX .....	6/36 e 12/2	poles + ⊕	152+153 *
CX .....	4/0 e 4/2	poles + ⊕	154 *
MIXO .....	4	modules	160+195 *

insert centre distance: 77,5 x 27 mm

\* refer to catalogue page CN.12

## housings with double lever




## hoods with 4 pegs



description	part no.	entry M	part no.	entry M
bulkhead mounting housing, with 2 levers	CHIN 16			
surface mounting housing, high construction, with 2 levers	MAPN 16.32	32		
hood with pegs, <sup>1)</sup> side entry, high construction			MFON 16.32	32
hood with pegs, <sup>1)</sup> top entry, high construction			MFVN 16.32	32

\*\*) only in the CHIN 16 enclosure

panel cut-out for bulkhead mounting housing in mm

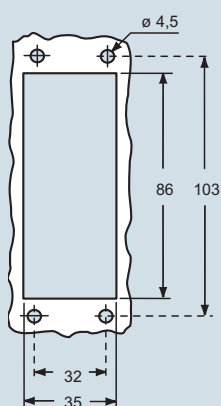

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)


<sup>1)</sup> Hoods with height 58/63  
Part nos:

- MHON 16.32 (63 mm)
- MHVN 16.32 (58 mm)


Can be supplied on request

## dimensions in mm

## CHIN 16

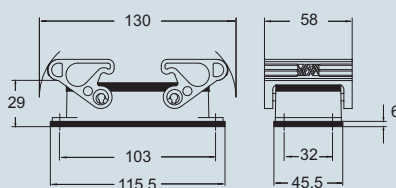


## MAPN 16.32

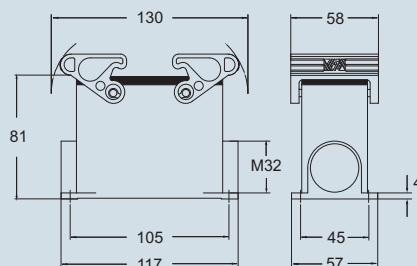


## dimensions in mm

## MFON 16.32



## MFVN 16.32



dimensions shown are not binding  
and may be changed without notice



inserts:		page
CD .....	40 poles + ⊕	49+52 *
CDD .....	72 poles + ⊕	62+65 *
CQE .....	32 poles + ⊕	82+84 *
CSH .....	16 poles + ⊕	90+92 *
CCE .....	16 poles + ⊕	98+102 *
CNE, CSE, JCNE, JCSE	16 poles + ⊕	99 and 108 *
CSS .....	16 poles + ⊕	120+122 *
CMSE .....	6+2 (aux) poles + ⊕	137 *
CMCE .....	6+2 (aux) poles + ⊕	136 *
CP .....	6 poles + ⊕	149+150 *
CX .....	6/36 e 12/2 poles + ⊕	152+153 *
CX .....	4/0 e 4/2 poles + ⊕	154 *
MIXO .....	4 modules	160+195 *

insert centre distance: 77,5 x 27 mm

\* refer to catalogue page CN.12

hoods with 4 pegs




covers



description	part no.	entry M	part no.
hood with 2 levers and gasket, <sup>1)</sup> top entry, high construction	MFVN 16 G32	32	
cover with pegs cover with 2 levers			CHCN 16 CHCN 16 G


dimensions in mm

MFVN 16 G32

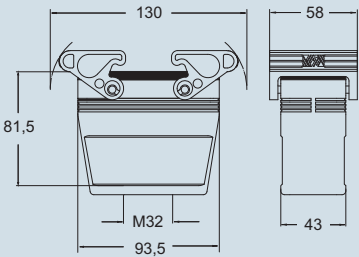


dimensions in mm

CHCN 16



CHCN 16 G

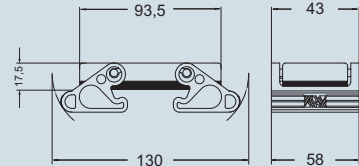

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

<sup>1)</sup> Hoods with height 63  
Part nos:  
- MHVN 16 G32

Can be supplied on request



dimensions shown are not binding  
and may be changed without notice

inserts:		page
CD .....	64 poles + ⊕	51+53 *
CTE, CTSE *) .....	64 poles + ⊕	57 *
CDD .....	108 poles + ⊕	64+66 *
CQE .....	46 poles + ⊕	83+85 *
CSH .....	24 poles + ⊕	91+93 *
CCE .....	24 poles + ⊕	100+104 *
CNE, CSE, JCNE, JCSE .....	24 poles + ⊕	101 and 109 *
CSS .....	24 poles + ⊕	122+123 *
CTE, CTSE **) .....	24 poles + ⊕	129 *
CMSE .....	10+2 (aux) poles + ⊕	139 *
CMCE .....	10+2 (aux) poles + ⊕	138 *
CX .....	4/8 poles + ⊕	155 *
MIXO .....	6 modules	160+195 *

insert centre distance: **104 x 27 mm**

\* refer to catalogue page CN.12

### housings with double lever




### hoods with 4 pegs



description	part no.	entry M	part no.	entry M
bulkhead mounting housing, with 2 levers	<b>CHIN 24</b>			
surface mounting housing, high construction, with 2 levers	<b>MAPN 24.32</b>	<b>32</b>		
hood with pegs, <sup>1)</sup> side entry, high construction			<b>MFON 24.32</b>	<b>32</b>
hood with pegs, <sup>1)</sup> side entry, high construction			<b>MFVN 24.32</b>	<b>32</b>

\*\*) only in the CHIN 24 enclosure

panel cut-out for bulkhead mounting housing in mm

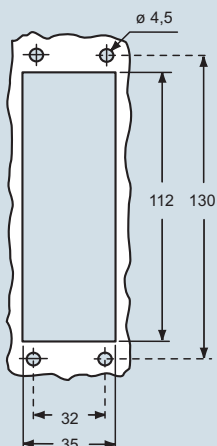

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)


<sup>1)</sup> Hoods with height 63/68  
Part nos:

- MHON 24.32 (63 mm)
- MHVN 24.32 (68 mm)


Can be supplied on request

dimensions in mm

#### CHIN 24

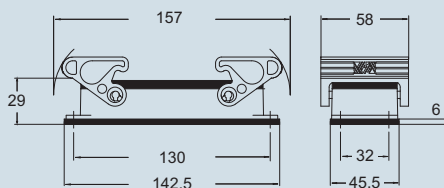


#### MAPN 24.32

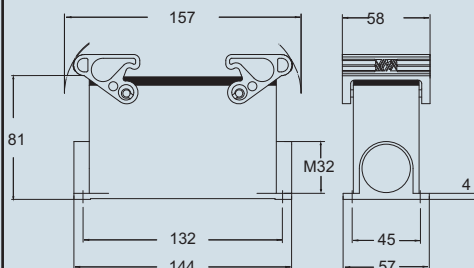


dimensions in mm

#### MFON 24.32



#### MFVN 24.32



dimensions shown are not binding  
and may be changed without notice





inserts:		page
CD .....	64 poles + ⊕	51+53 *
CDD .....	108 poles + ⊕	64+66 *
CQE .....	46 poles + ⊕	83+85 *
CSH .....	24 poles + ⊕	91+93 *
CCE .....	24 poles + ⊕	100+104 *
CNE, CSE, JCNE, JCSE	24 poles + ⊕	101 and 109 *
CSS .....	24 poles + ⊕	121+123 *
CMSE .....	10+2 (aux) poles + ⊕	139 *
CMCE .....	10+2 (aux) poles + ⊕	138 *
CX .....	4/8 poles + ⊕	155 *
MIXO .....	6 modules	160+195 *

insert centre distance: 104 x 27 mm

\* refer to catalogue page CN.12

hoods with 4 pegs




covers



description	part no.	entry M	part no.
hood with 2 levers and gasket, <sup>1)</sup> top entry, high construction	MFVN 24 G32	32	
covers with pegs covers with 2 levers			CHCN 24 CHCN 24 G


dimensions in mm

MFVN 24 G32

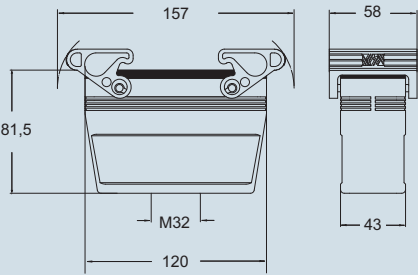


dimensions in mm

CHCN 24



CHCN 24 G

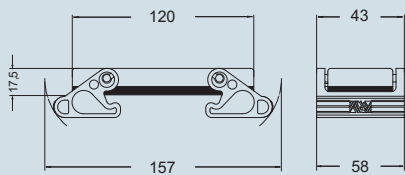

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

<sup>1)</sup> Hoods with height 73  
Part nos:  
- MHVN 24 G32

Can be supplied on request



dimensions shown are not binding  
and may be changed without notice



spare part lever



spare part lever



description

part no.

part no.

for "44.27" enclosures with levers


**CR 06 LN**

for "57.27", "77.27", "104.27" enclosures with levers

**CR LN**


dimensions in mm

**CR 06 LN**



dimensions in mm

**CR LN**



dimensions shown are not binding  
and may be changed without notice


### CK - CKS

Screw terminal connection 10A - 250V  
Spring connection 10A - 400V  
..... from page 41



### CD

Crimp connection 10A - 250V  
10A - 50V  
..... from page 44




### CT - CTS

Screw terminal connection 10A - 250V  
Spring connection 10A - 250V  
..... from page 54



### CDD

Crimp connection 10A - 250V  
..... from page 58



### CQ

Crimp connection 10A/16A/40A  
..... from page 67



### CDA - CDC

Screw terminal connection 16A - 250V  
Crimp connection 16A - 250V  
..... from page 72



### CQE

Crimp connection 16A - 500V  
..... from page 79



### CSH

Spring connection 16A - 500V  
without tools  
..... from page 86



### CNE - CSE - CCE

Screw terminal connection 16A - 500V  
Spring connection 16A - 500V  
Crimp connection 16A - 500V  
..... from page 95



### JCNE - JCSE

Screw terminal connection 16A - 500V  
Spring connection 16A - 500V  
..... from page 106



### CSS

Spring connection 16A - 500V  
dual terminal  
..... from page 118



### CT - CTE - CTS

Screw terminal connection 16A - 400V/500V  
Spring connection  
..... from page 124



### C-TYPE

page 200

- metallic
- CLASS rotative lever
- IP65/IP66



### V-TYPE IP67

page 249

- metallic
- water tightness in a limited space
- lever in stainless steel
- IP66/IP67



### V-TYPE IP65/IP66

page 260

- metallic
- water tightness in a limited space
- lever in stainless steel
- IP65/IP66



### T-TYPE

page 277

- insulating
- robust
- resistant to chemical agents
- IP65



### JEI

page 287

- metallic
- lever in galvanised steel
- economic
- IP65/IP66



### BIG - HOOD

page 296

- large and modular
- multiple cable entries
- simple and easy cable inspection
- seat for electronic boards
- IP66



### CMCE - CME - CMSE

Crimp connection 16A - 830V  
Screw terminal connection 16A - 830V  
Spring connection 16A - 830V  
..... from page 134



### CP

Screw terminal connection 35A - 400/690V  
..... from page 149



### CX - MIXED INSERTS

Crimp connection 10A/16A/40A  
..... from page 151



### CX

Screw terminal connection 16A/80A  
..... from page 154



### MIXO

Crimp connection 200A/100A/70A  
40A/16A/10A/5A  
..... from page 160



### MIXO

Screw terminal connection 40A  
..... from page 165



### MIXO

Spring connection 16A  
..... from page 172




### MIXO

Data RJ45-USB-POF  
BUS-COAX  
..... from page 183



### MIXO

Pneumatic  
..... from page 191



### DESINA

Crimp connection  
..... from page 449



### COB

- mounting inside control panel  
- inspectable  
..... page 408



### PANEL MOUNTING

..... page 413



### W-TYPE

page 322

- metallic with chrome treatment  
- for aggressive environments  
- IP66



### EMC

page 335

- for electromagnetic compatibility  
- with conductive gaskets  
- IP66



### 180 °C

page 352

- metallic  
- for high temperature environments  
- IP65



### CENTRAL LEVER

page 359

- for limited mounting spaces  
- reduces insert uncoupling stress  
- IP65



### IP68

page 369

- watertight  
- mechanical robustness  
- resistant to chemical agents  
- screw or bayonet locking



### 830 V

page 390

- insulated for CME  
and CMCE 16p inserts  
- CLASS rotative lever  
- IP65/IP66





inserts:		page
<b>CK</b> .....	3 poles + ⊕	40 *
<b>CK</b> .....	4 poles + ⊕	40 *
<b>CKS</b> .....	3 poles + ⊕	41 *
<b>CKS</b> .....	4 poles + ⊕	41 *
<b>CD</b> .....	7 poles + ⊕	45 *
<b>CD</b> .....	8 poles	46 *
<b>CQ</b> .....	5 poles + ⊕	69 *
<b>CQ</b> .....	12 poles + ⊕	68 *

insert dimensions:  
21 x 21 mm


\* page references CN.12 catalogue

**bulkhead mounting housings**


**angled bulkhead mounting housings**


description	part no.	part no. (entry - Pg 11)	part no. (entry - M 20)
with lever	<b>CK 03 IN</b> (black)		
without cable gland entry, with lever		<b>CK 03 IAN</b> (black)	
with cable gland entry and lever		<b>CK 03 IAPNS</b> (black)	<b>MK IAPN20</b> (black)
gasket and screw kit for IP66/IP67 <sup>1)</sup> for CK, CQ 05, CKS inserts	<b>CKR 65</b>	<b>CKR 65</b>	
gasket and screw kit for IP66/IP67 <sup>1)</sup> for CD 07/08 inserts	<b>CKR 65 D</b>	<b>CKR 65 D</b>	

panel cut-out for enclosures, in mm




1) To obtain the protection rating IP66/IP67 a kit is provided that includes a gasket to fit under the insert fixing screws supplied with the kit (see illustrative example)  
CQ 12 inserts are already supplied with a gasket and screw which ensure IP66/IP67 protection rating




dimensions in mm

**CK I(N)**




dimensions in mm

**CK IA(N)**

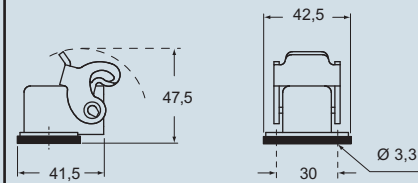

**CK IAP(N)S and MK IAP(N)**

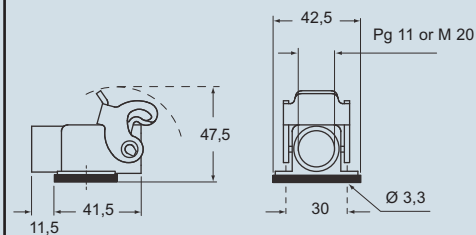

**CALUS**

Type 12  
Type 4/4X only  
with CKR 65 (D)



IP66/IP67 with CKR 65 (D) <sup>1)</sup>

dimensions shown are not binding  
and may be changed without notice

inserts:		page
<b>CK</b> .....	3 poles + ⊕	40 *
<b>CK</b> .....	4 poles + ⊕	40 *
<b>CKS</b> .....	3 poles + ⊕	41 *
<b>CKS</b> .....	4 poles + ⊕	41 *
<b>CD</b> .....	7 poles + ⊕	45 *
<b>CD</b> .....	8 poles	46 *
<b>CQ</b> .....	5 poles + ⊕	69 *
<b>CQ</b> .....	12 poles + ⊕	68 *

insert dimensions:  
21 x 21 mm


\* page references CN.12 catalogue

**hoods**




**covers**


description	part no. (entry - Pg 11)	part no. (entry - M 20)	part no.
with pegs, top entry	<b>CK 03 VNS</b> (black)	<b>MK VN20</b> (black)	
with pegs, top entry	<b>CK 03 VANS</b> (black)	<b>MK VAN20</b> (black)	
with lever, top entry	<b>CK 03 VGNS</b> (black)	<b>MK VGN20</b> (black)	
with pegs and gasket, for female inserts with pegs, for male inserts			<b>CK 03 CN</b> (black) <b>CK 03 CAN</b> (black)
with lever and gasket, for female inserts with lever, for male inserts			<b>CK 03 CXN</b> (black) <b>CK 03 CXAN</b> (black)
gasket and screw kit for IP66/IP67 <sup>1)</sup> for CK, CQ 05, CKS inserts	<b>CKR 65</b>		
gasket and screw kit for IP66/IP67 <sup>1)</sup> for CD 07/08 inserts	<b>CKR 65 D</b>		





1) To obtain the protection rating IP66/IP67 a kit is provided that includes a gasket to fit under the insert fixing screws supplied with the kit (see illustrative example)  
CQ 12 inserts are already supplied with a gasket and screw which ensure IP66/IP67 protection rating



dimensions in mm

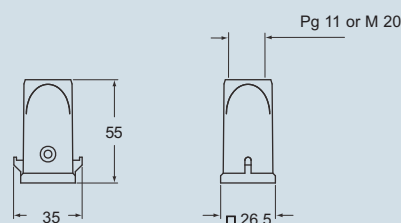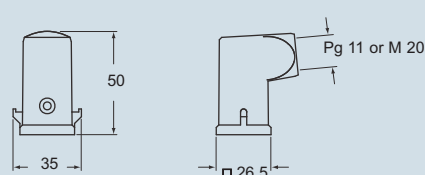**CK V(N)S and MK V(N)**

**CK VA(N)S and MK VA(N)**

**CK VG(N)S and MK VG(N)**


dimensions in mm

**CK C(N)**

**CK CA(N)**

**CK CX(N)**

**CK CXA(N)**


Type 12  
Type 4/4X only  
with CKR 65 (D)



IP66/IP67 with CKR 65 (D) <sup>1)</sup>

dimensions shown are not binding  
and may be changed without notice

## **pluso-N** - Plugs and sockets for LS-TYPE version

These products are the ideal choice for the entertainment industry (to supply lighting equipment and mixer/dimmer assemblies) and are typically used on theatre stages, cinema sets, radio and television broadcasting studios, discos, fair stands, concert halls, public night events, both indoors and outdoors, and similar scenarios.

**pluso**



## pluso-N - Plugs and sockets for LS-TYPE version

pluso

All models share the extraordinary features of the equivalent versions in grey colour.

The elegant colour of all visible plastic parts and the labels in non reflecting grey, which are used only when the markings are not printed, add a touch of discretion and make these products particularly suitable for scenarios and areas where plugs, sockets and cables should be invisible in absence of light.

The range includes several models:

Couplers, flush-mounting, with IP44 protection degree or IP67 on request (couplers and sockets have an IP66/IP67 protection degree).

**NOTE** - Products are available with different voltage and/or frequency and current ratings on request.







- PN...SV types 16A (IP44), entry with cable gland colour RAL 9005 black, enclosure colour RAL 9005 black
- PN...PV types 16A (IP44), enclosure and spring lid colour RAL 9005 black, entry with cable gland
- Compliant with EN 60309-1 and -2
- PN...SV types, enclosure and insert in insulating, thermoplastic, self-extinguishing material
- PN...PV types, enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- Terminals with retained screws
- IP44 degree of protection (EN 60529)

16A coupler plugs  
IP44 degree of protection  
low voltage:  
from over 50V up to 690V



NEW

16A coupler socket-outlets  
IP44 degree of protection  
low voltage:  
from over 50V up to 690V




NEW

Number of poles	Frequency Hz	Voltage V	Earthing contact position h	Part No.	Part No.
2P+⊕	50 e 60	200 ÷ 250	6	PN 1663 SV	PN 1663 PV
3P+⊕	50 e 60	380 ÷ 415	6	PN 1664 SV	PN 1664 PV
3P+N+⊕	50 e 60	200/346 ÷ 240/415	6	PN 1665 SV	PN 1665 PV

dimensions in mm


(16A) PN ... SV



PN...SV	A	B	ø min	ø max
16A 2P+⊕	129	59,5	7	16
3P+⊕	129	67	7	16
3P+N+⊕	129	75	8	24

dimensions in mm

(16A) PN ... PV



PN...PV	A	B	ø min	ø max
16A 2P+⊕	146	74,5	7	16
3P+⊕	146	84,5	7	16
3P+N+⊕	146	92,5	8	24

dimensions shown are not binding  
and may be changed without notice

- Enclosure and spring lid colour RAL 9005 black
- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- Flange with anti-ageing gasket
- PN...PI - PN...PQ types (IP44), spring lid
- Terminals with retained screws
- IP44 degree of protection (EN 60529)

**16A flush-mounting inclined socket-outlets**  
**IP44 degree of protection**  
**low voltage:**  
**from over 50V up to 690V**



**NEW**

**16A flush-mounting straight socket-outlets**  
**IP44 degree of protection**  
**low voltage:**  
**from over 50V up to 690V**




**NEW**

Number of poles	Frequency Hz	Voltage V	Earthing contact position h	Part No.	Part No.
<b>2P+⊕</b>	50 e 60	200 ÷ 250	6	<b>PN 1663 PI</b>	<b>PN 1663 PQ</b>
<b>3P+⊕</b>	50 e 60	380 ÷ 415	6	<b>PN 1664 PI</b>	<b>PN 1664 PQ</b>
<b>3P+N+⊕</b>	50 e 60	200/346 ÷ 240/415	6	<b>PN 1665 PI</b>	<b>PN 1665 PQ</b>


dimensions in mm

**(16A) PN ... PI**

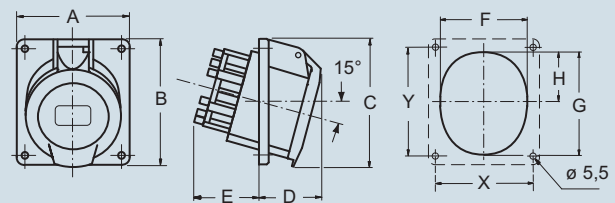

PN ... PI	A	B	C	D	E	F	G	H	X	Y
<b>16A</b> 2P+⊕	64	82	82	38	46	52	62	30	52	60
3P+⊕	64	82	82	42	47	57	65	28	52	60
3P+N+⊕	92	100	100	43	47	66	78	37,5	77	85

**(16A) PN ... PQ**

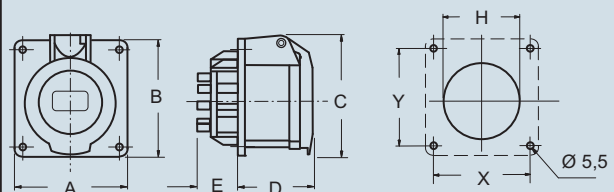

PN...PQ	A	B	C	D	E	H	X	Y
<b>16A</b> 2P+⊕	65	65	71	52	27	60	52	52
3P+⊕	65	65	75	53	27	61,5	52	52
3P+N+⊕	80	80	86	53	27	70	60	60

dimensions shown are not binding  
 and may be changed without notice

## The Company and the Product

INDUSTRIA LOMBARDA MATERIALE ELETTRICO SpA has been operating in Milan since 1938, in particular in the electrotechnical sector for the manufacturing of equipment for industrial installations.

ILME reflects the traditional **entrepreneurial spirit of Lombardy**, and has enjoyed continuous expansion for over half a century. The company has carved an important role for itself in the main world markets, also operating directly in the countries that have assumed world leadership in the field of automation, including Germany and Japan.

In the **electrical connection** sector with applications in industrial automation, characterised by **top performance** and utmost **reliability needs**, ILME is today the acknowledged partner of many leading companies worldwide.

The company's fundamental values are:

**product innovation**, original solutions, excellent **price-quality ratio**, a customer-oriented **sense of service**, ethical behaviour and an environmentally-friendly approach.



To promote the continuing improvement of its **qualitative results**, ILME has always encouraged its collaborators to work with utmost **responsibility and participation**.

The company focuses on a series of benefits to the user, including research into the most suitable materials, high quality and safe cabling, a rapid turnaround and readily available services.

## CE marking

As from 1 January 1997, in order to launch electrical products on the European market the manufacturer must ensure these bear the relevant CE marking, in line with the Low Voltage Directive 73/23/EEC \* (implemented in Italy as law 18-10-1977 no. 791) and its modification 93/68/EEC \* (implemented in Italy as L. D. 25-11-1996 no. 626/96, published in the supplement to the Gazzetta Ufficiale of 14-12-1996). Said marking must be placed on the product - or, if this is not possible, on the packaging, the instructions for use or the warranty certificate - and acts as a declaration by the manufacturer that the product complies with all relevant EU directives.

### ILME products bear the CE marking on the product or packaging.

Almost all ILME products fall under the Low Voltage Directive. A declaration of compliance is required before applying the CE marking. This document, to which the market is not directly entitled, must be made available to the control authorities (in Italy the Ministry for Industry, Commerce and Handicraft) at all times.

In it, the manufacturer declares the technical safety standard(s) followed to manufacture the product. These standards must be, in decreasing order of preference:

- a European standard (EN prefix)
- a European harmonisation document (HD prefix)
- an international IEC standard
- a national standard
- in the absence of reference standards, the manufacturer's internal specifications, guaranteeing compliance with the directive's basic safety requirements.

Compliance with harmonised technical standards (i.e. ratified by the CENELEC) constitutes presumed conformity to the directive's basic safety requirements.

The CE marking of ILME products results from said products' declaration of conformity to harmonised standards or international IEC standards.

Through the CE marking, ILME declares full compliance, not merely with the directive's basic safety requirements, but also with those international or national EU standards on which voluntary safety certification markings are based (e.g. IMQ and VDE).

In this way, ILME intends to award the CE marking the value of self-certification in terms of safety, given the loss in legal value of voluntary certifications issued by third parties, ratified by directive 93/68/EEC \*.

Notwithstanding the above, practically all ILME products still bear voluntary conformity markings.

### \* Note:

new legal reference for the Low Voltage Directive is 2006/95/EC which is the consolidated edition of Directive 73/23/EEC + Directive 93/68/EEC.