

inserts: page
CME3+2 (aux) poles + ⊕ 135

insert centre distance:
57 x 27 mm

bulkhead mounting housings
with 2 levers or 4 pegs



bulkhead mounting housings
with single lever




description	part no.	part no.
with one or two levers	CMI 03	CMI 03 L
with pegs and aluminum cover ¹⁾	CMI 03 CS	
with pegs and plastic cover ¹⁾	CMI 03 CP	
with lever and cover		CMI 03 LS

¹⁾ may be combined with enclosures:
- CMO/CMAO 03 X and CMV/CMAV 03 X
- MMO/MMAO 03 X and MMV/MMAV 03 X


NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.
The door (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

panel cut-out for bulkhead mounting housings in mm




dimensions in mm

CMI

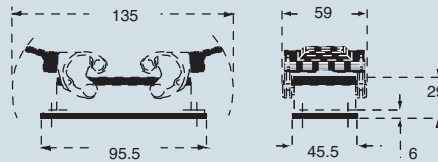


dimensions in mm


CMI L

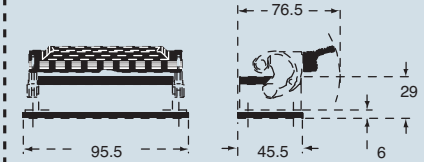

CMI CS/CP

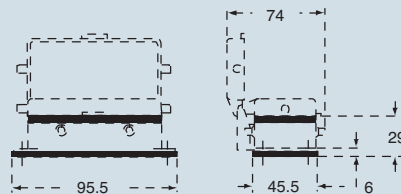

CMI LS

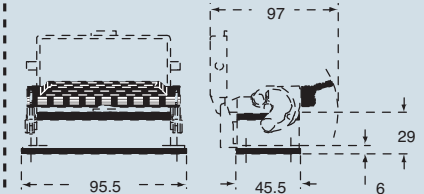

CALUS Type 4/4X/12

(excluding enclosures with plastic cover)



dimensions shown are not binding
and may be changed without notice

inserts: page
CME3+2 (aux) poles + ⊕ 135

insert centre distance:
57 x 27 mm

**surface mounting housings
 with 2 levers or 4 pegs**



**surface mounting housings
 with single lever**




description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with levers	CMP 03	16	MMP 03.20	20	CMP 03 L	16	MMP 03 L20	20
with levers	CMP 03.2	16 x 2	MMP 03.220	20 x 2	CMP 03 L2	16 x 2	MMP 03 L220	20 x 2
with levers, high construction	CMAV 03.21	21	MMAP 03.32	32	CMAV 03 L	21	MMAP 03 L32	32
with levers, high construction	CMAV 03.221	21 x 2	MMAP 03.232	32 x 2	CMAV 03 L2	21 x 2	MMAP 03 L232	32 x 2
with levers, high construction	CMAV 03.29	29	MMAP 03.40	40	CMAV 03 L29	29	MMAP 03 L40	40
with levers, high construction	CMAV 03.229	29 x 2	MMAP 03.240	40 x 2	CMAV 03 L229	29 x 2	MMAP 03 L240	40 x 2
with pegs and aluminum cover ¹⁾	CMP 03 CS	16	MMP 03 CS20	20				
with pegs and aluminum cover ¹⁾	CMP 03 CS2	16 x 2	MMP 03 CS220	20 x 2				
with pegs and aluminum cover, high construction ¹⁾	CMAV 03 CS	21	MMAP 03 CS32	32				
with pegs and aluminum cover, high construction ¹⁾	CMAV 03 CS2	21 x 2	MMAP 03CS232	32 x 2				
with pegs and aluminum cover, high construction ¹⁾	CMAV 03 CS29	29	MMAP 03 CS40	40				
with pegs and aluminum cover, high construction ¹⁾	CMAV 03CS229	29 x 2	MMAP 03CS240	40 x 2				
with pegs and plastic cover ¹⁾	CMP 03 CP	16	MMP 03 CP20	20				
with pegs and plastic cover ¹⁾	CMP 03 CP2	16 x 2	MMP 03 CP220	20 x 2				
with pegs and plastic cover, high construction ¹⁾	CMAV 03 CP	21	MMAP 03 CP32	32				
with pegs and plastic cover, high construction ¹⁾	CMAV 03 CP2	21 x 2	MMAP 03CP232	32 x 2				
with pegs and plastic cover, high construction ¹⁾	CMAV 03 CP29	29	MMAP 03 CP40	40				
with pegs and plastic cover, high construction ¹⁾	CMAV 03CP229	29 x 2	MMAP 03CP240	40 x 2				
with lever and cover					CMP 03 LS	16	MMP 03 LS20	20
with lever and cover					CMP 03 LS2	16 x 2	MMP 03 LS220	20 x 2
with lever and cover, high construction					CMAV 03 LS	21	MMAP 03 LS32	32
with lever and cover, high construction					CMAV 03 LS2	21 x 2	MMAP 03LS232	32 x 2
with lever and cover, high construction					CMAV 03 LS29	29	MMAP 03 LS40	40
with lever and cover, high construction					CMAV 03LS229	29 x 2	MMAP 03LS240	40 x 2

¹⁾ may be combined with enclosures:
 - CMO/CMAO 03 X and CMV/CMAV 03 X
 - MMO/MMAO 03 X and MMV/MMAV 03 X


NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.
 The door (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

dimensions in mm

CMP - CMAV and MMP - MMAP

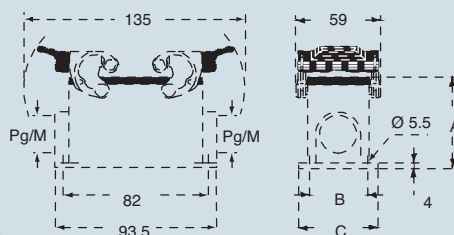


CMP CS/CP - CMAV CS/CP and MMP CS/CP - MMAP CS/CP

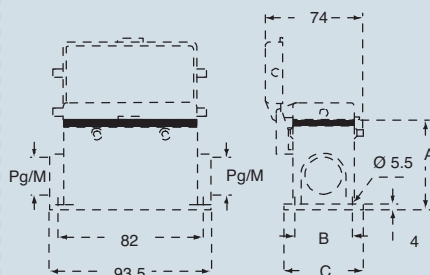


type	A	B	C
CMP / MMP	57	40	52
CMAV / MMAP	74	45	57
CMP CS / MMP CS	57	40	52
CMAV CS / MMAP CS	74	45	57
CMP CP / MMP CP	57	40	52
CMAV CP / MMAP CP	74	45	57

dimensions in mm

CMP L - CMAV L and MMP L - MMAP L

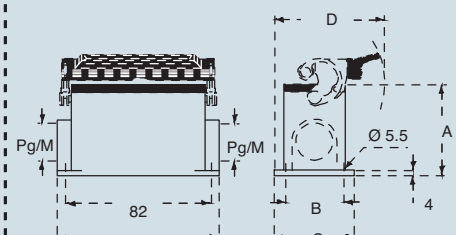

CMP LS - CMAV LS and MMP LS - MMAP LS

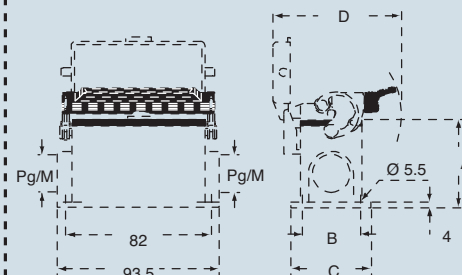

type	A	B	C	D
CMP L / MMP L	57	40	52	79.5
CMAV L / MMAP L	74	45	57	82
CMP LS / MMP LS	57	40	52	97
CMAV LS / MMAP LS	74	45	57	97

CAVUS Type
 4/4X/12

(excluding enclosures with plastic cover)



dimensions shown are not binding
 and may be changed without notice

inserts: page
CME3+2 (aux) poles + ⊕ 115

insert centre distance:
57 x 27 mm

hoods with 4 pegs



hoods with 2 pegs




description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with pegs, side entry	CMO 03	16	MMO 03.20	20	CMO 03 L	16	MMO 03 L20	20
with pegs, side entry			MMO 03.25	25			MMO 03 L25	25
with pegs, side entry, high construction	CMAO 03.21	21	MMAO 03.32	32	CMAO 03 L21	21	MMAO 03 L32	32
with pegs, side entry, high construction	CMAO 03.29	29	MMAO 03.40	40	CMAO 03 L29	29	MMAO 03 L40	40
with pegs, top entry	CMV 03	16	MMV 03.20	20	CMV 03 L	16	MMV 03 L20 **	20
with pegs, top entry			MMV 03.25	25			MMV 03 L25	25
with pegs, top entry, high construction	CMAV 03.21	21	MMAV 03.32	32	CMAV 03 L21	21	MMAV 03 L32	32
with pegs, top entry, high construction	CMAV 03.29	29	MMAV 03.40	40	CMAV 03 L29	29	MMAV 03 L40	40
with pegs, frontal entry, high construction	CMAF 03	16	MMAF 03.20	20				
with pegs, frontal entry, high constr., without adaptor *	CMFF 03	16	MMFF 03.20	20				

* enclosure without adaptor, threaded on the enclosure body, to be used only with a complete cable gland.

** can only be used with a complete cable gland (to be purchased separately)

dimensions in mm


CMO (CMAO) and MMO (MMAO)

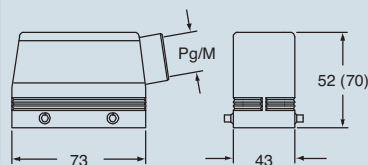

CMV (CMAV) and MMV (MMAV)




CMAF/CMFF and MMAF/MMFF



dimensions in mm

CMO L (CMAO L) and MMO L (MMAO L)

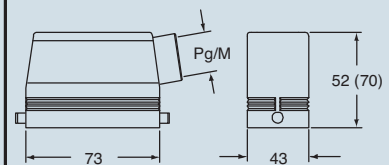

CMV L (CMAV L) and MMV L (MMAV L)



CAUS® Type
4/4X/12



dimensions shown are not binding
 and may be changed without notice

inserts:	page
CME3+2 (aux) poles + $\oplus$	135

insert centre distance:
57 x 27 mm

hoods with 2 levers



hoods with 1 lever




description	part no.		entry Pg		part no.		entry M		part no.		entry Pg		part no.		entry M	
with levers and gasket, top entry	CMV 03 G	16	MMV 03 G25	25	CMV 03 LG	16	MMV 03 LG25	25								
with levers and gasket, top entry, high construction	CMAV 03 G	21	MMAV 03 G25	25	CMAV 03 LG21	21	MMAV 03 LG25	25								
with levers and gasket, top entry, high construction	CMAV 03 G29	29	MMAV 03 G32	32	CMAV 03 LG29	29	MMAV 03 LG32	32								
with levers and gasket, top entry, high, without adapter *	CMFV 03 G	21	MMFV 03 G25	25	CMFV 03 LG21	21	MMFV 03 LG25	25								
with levers and gasket, top entry, high, without adapter *	CMFV 03 G29	29	MMFV 03 G32	32	CMFV 03 LG29	29	MMFV 03 LG32	32								

* enclosure without adaptor, threaded on the enclosure body, to be used only with a complete cable gland.


dimensions in mm

**CMV G (CMAV G) and [CMFV G],
MMV G (MMAV G) and [MMFV G]**

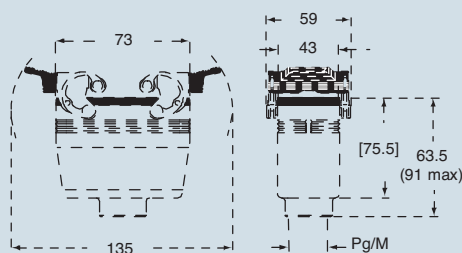

dimensions in mm

**CMV LG (CMAV LG) and [CMFV LG],
MMV LG (MMAV LG) and [MMFV LG]**

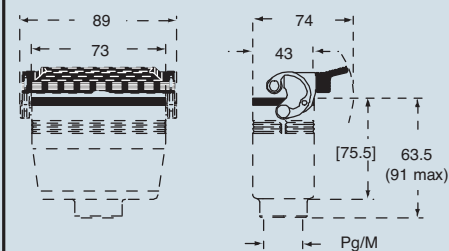

CAL[®] US Type 4/4X/12



dimensions shown are not binding
and may be changed without notice


inserts: page
CME3+2 (aux) poles + ⊕ 135

insert centre distance:
57 x 27 mm

hoods with 2 levers



covers

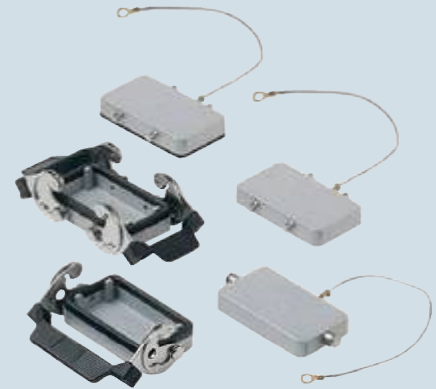


description	part no.	entry Pg	part no.	entry M	part no.
with levers, side entry ¹⁾	CMO 03 X	16	MMO 03 X20	20	
with levers, side entry ¹⁾			MMO 03 X25	25	
with levers, side entry, high construction ¹⁾	CMAO 03 X	21	MMAO 03 X32	32	
with levers, side entry, high construction ¹⁾	CMAO 03 X29	29	MMAO 03 X40	40	
with levers, top entry ¹⁾	CMV 03 X	16	MMV 03 X20	20	
with levers, top entry ¹⁾			MMV 03 X25	25	
with levers, top entry, high construction ¹⁾	CMAV 03 X	21	MMAV 03 X32	32	
with levers, top entry, high construction ¹⁾	CMAV 03 X29	29	MMAV 03 X40	40	
with 4 pegs (for enclosures with 2 levers with gasket)					CHC 10
with 4 pegs and gasket (for enclosures with 2 levers) ²⁾					CHC 10 C
with 2 pegs (for enclosures with 1 lever with gasket)					CHC 10 L
with 2 levers (for hoods with 4 pegs)					CHC 10 G
with 1 lever (for hoods with 2 pegs)					CHC 10 LG

¹⁾ may be combined with enclosures:
- CMI/CMP/CMA 03 CS/CP
- MMP/MMAP 03 CS/CP


²⁾ may be combined with enclosures:
- CMO/CMAO 03 X and CMV/CMAV 03 X
- MMO/MMAO 03 X and MMV/MMAV 03 X

dimensions in mm

CMO X (CMAO X) and MMO X (MMAO X)

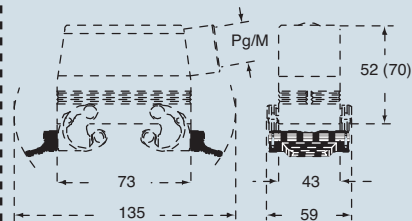


CMV X (CMAV X) and MMV X (MMAV X)

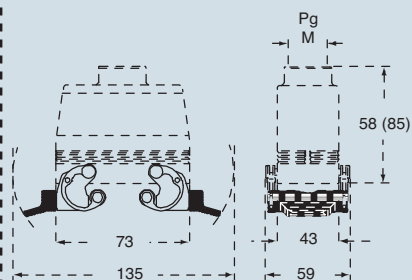


dimensions in mm


CHC




CHC C



CHC L



CHC G




CHC LG



CALUS Type 4/4X/12



dimensions shown are not binding
and may be changed without notice

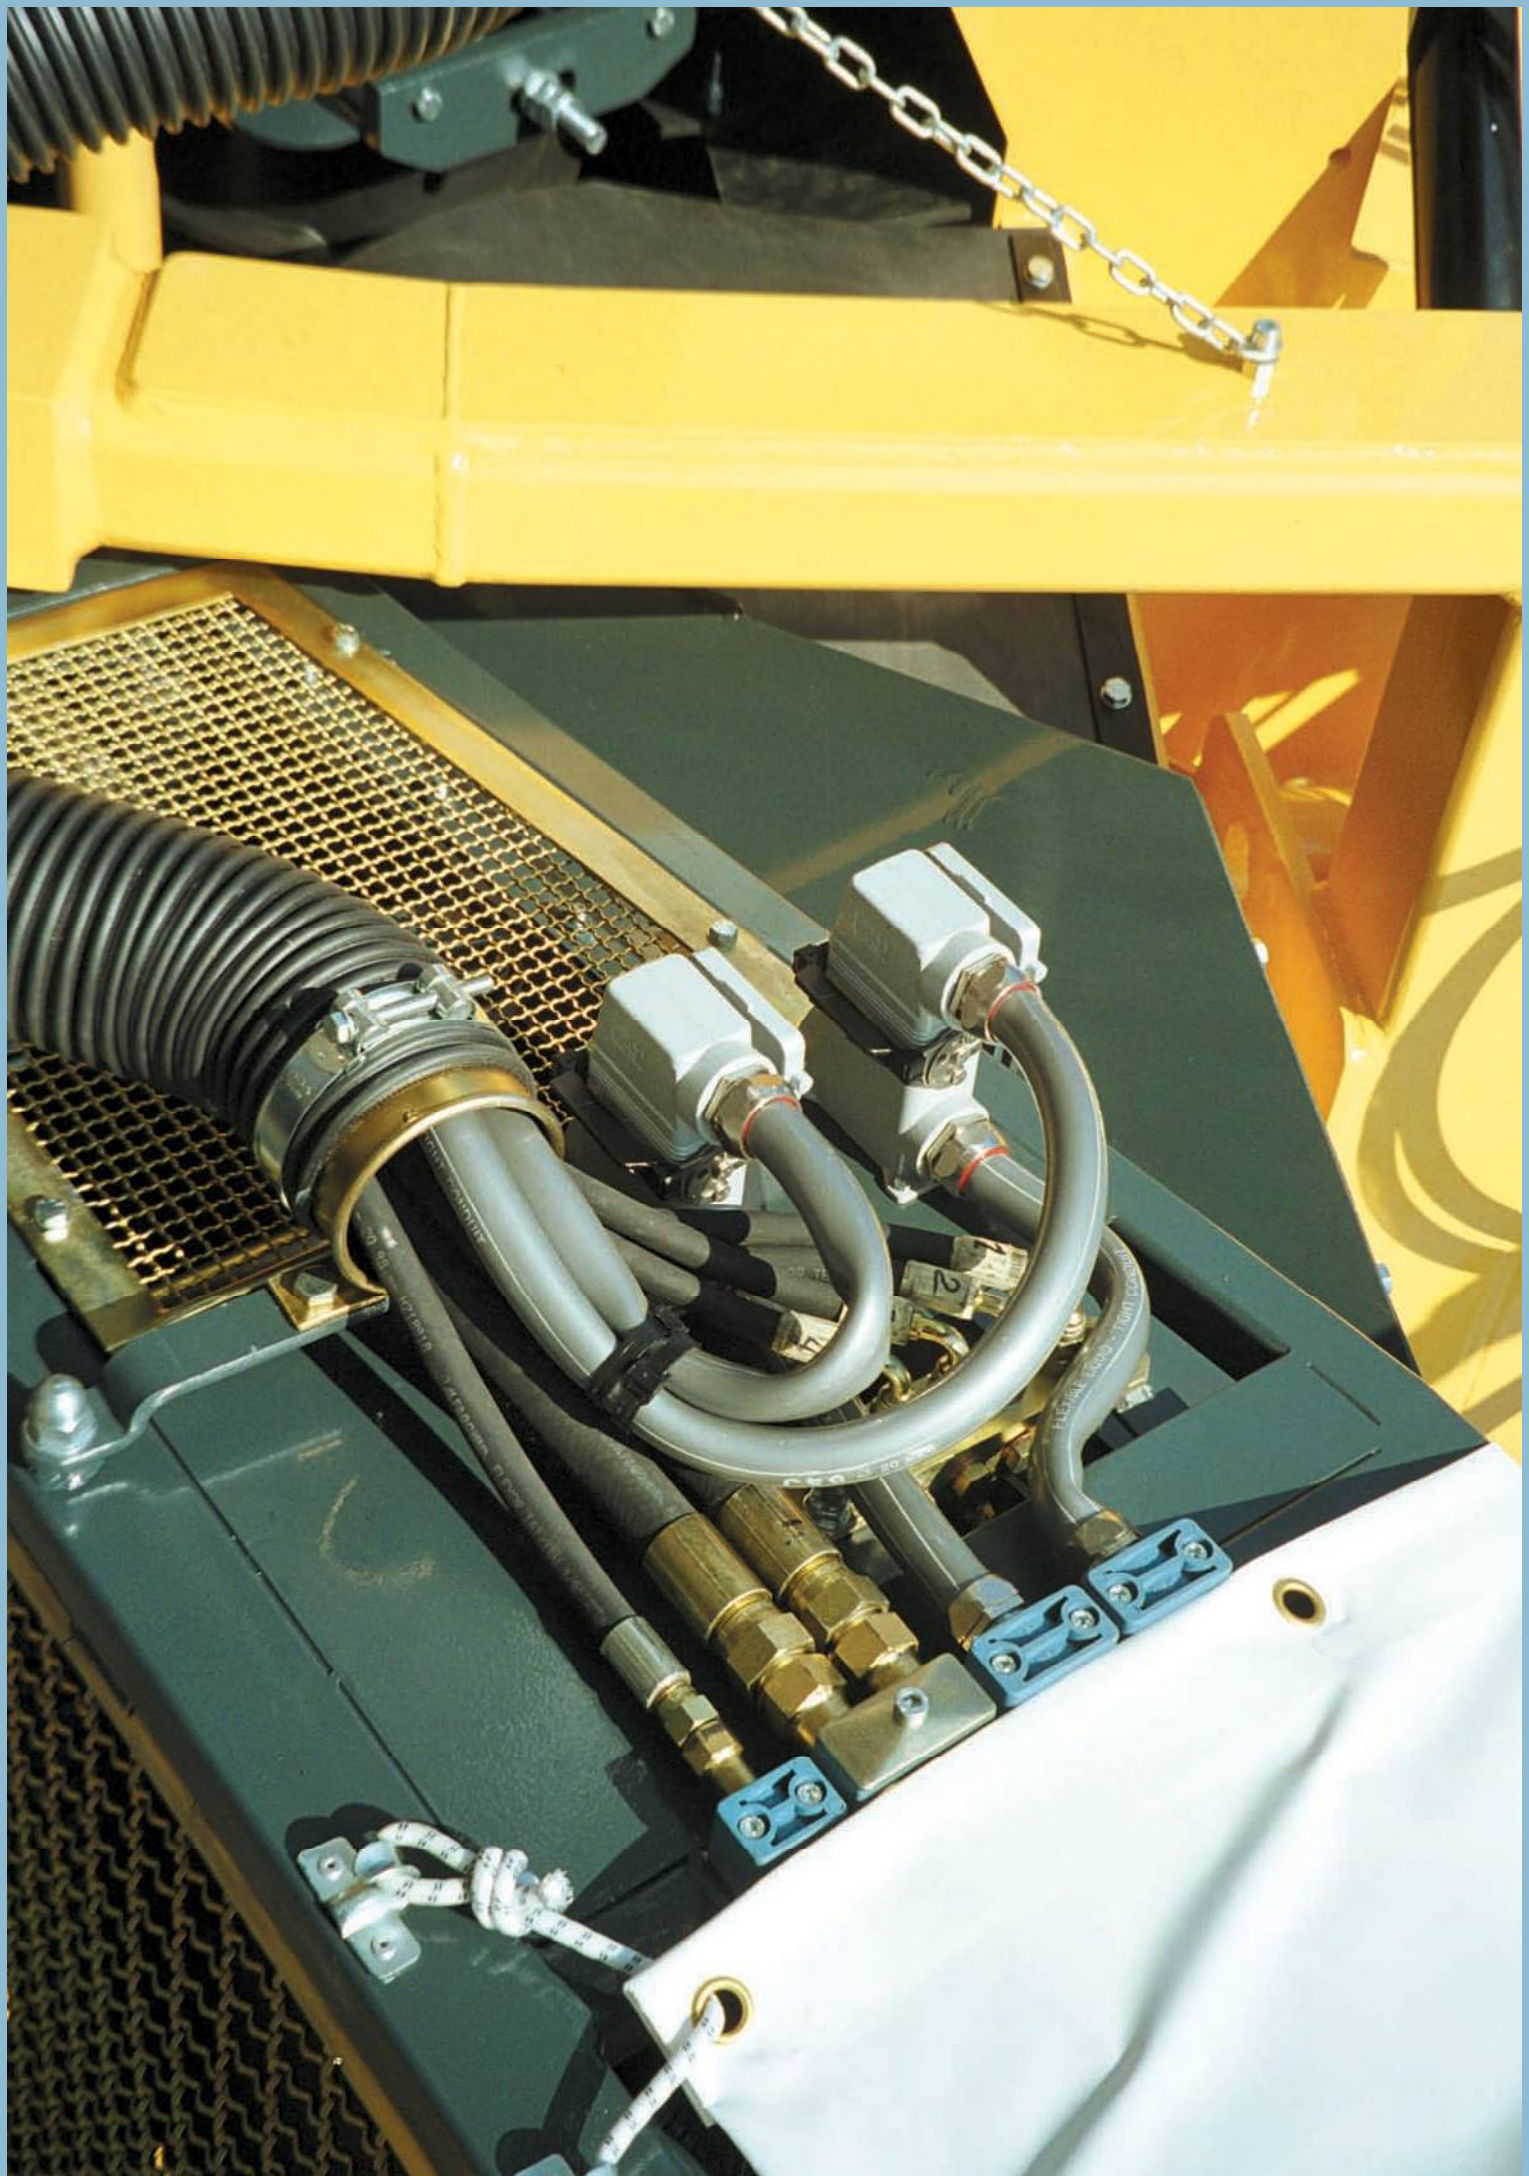

inserts: page
CME 6+2 (aux) poles + ⊕ 137

insert centre distance:
77.5 x 27 mm

bulkhead mounting housings
with 2 levers or 4 pegs



bulkhead mounting housings
with single lever




description	part no.	part no.
with one or two levers	CMI 06	CMI 06 L
with pegs and aluminum cover ¹⁾	CMI 06 CS	
with pegs and plastic cover ¹⁾	CMI 06 CP	
with lever and cover		CMI 06 LS

¹⁾ may be combined with enclosures:
- CMO/CMAO 06 X and CMV/CMAV 06 X
- MMO/MMAO 06 X and MMV/MMAV 06 X


NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.
The door (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

panel cut-out for bulkhead mounting housings in mm

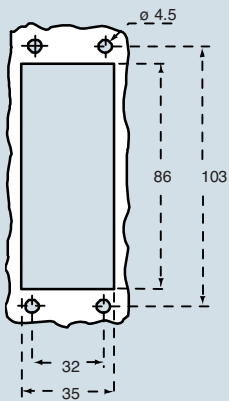


dimensions in mm

CMI

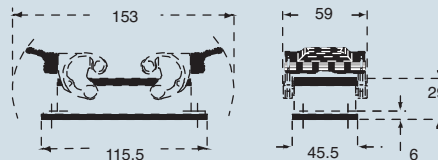


dimensions in mm


CMI L

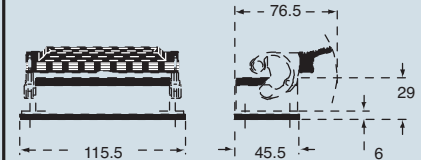

CMI CS/CP

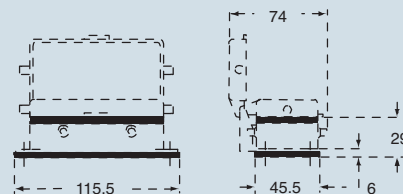

CMI LS

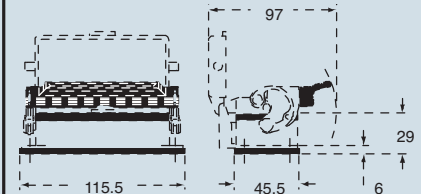

CALUS® Type
4/4X/12

(excluding enclosures with plastic cover)



dimensions shown are not binding
and may be changed without notice

inserts: page
CME 6+2 (aux) poles + ⊕ 137

insert centre distance:
77.5 x 27 mm

surface mounting housings
with 2 levers or 4 pegs



surface mounting housings
with single lever




description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with levers	CMP 06	21	MMP 06.25	25	CMP 06 L	21	MMP 06 L25	25
with levers	CMP 06.2	21 x 2	MMP 06.225	25 x 2	CMP 06 L2	21 x 2	MMP 06 L225	25 x 2
with levers, high construction	CMAF 06.21	21	MMAP 06.32	32	CMAF 06 L	21	MMAP 06 L32	32
with levers, high construction	CMAF 06.221	21 x 2	MMAP 06.232	32 x 2	CMAF 06 L2	21 x 2	MMAP 06 L232	32 x 2
with levers, high construction	CMAF 06.29	29	MMAP 06.40	40	CMAF 06 L29	29	MMAP 06 L40	40
with levers, high construction	CMAF 06.229	29 x 2	MMAP 06.240	40 x 2	CMAF 06 L229	29 x 2	MMAP 06 L240	40 x 2
with pegs and aluminum cover ¹⁾	CMP 06 CS	21	MMP 06 CS25	25				
with pegs and aluminum cover ¹⁾	CMP 06 CS2	21 x 2	MMP 06 CS225	25 x 2				
with pegs and aluminum cover, high construction ¹⁾	CMAF 06 CS	21	MMAP 06 CS32	32				
with pegs and aluminum cover, high construction ¹⁾	CMAF 06 CS2	21 x 2	MMAP 06CS232	32 x 2				
with pegs and aluminum cover, high construction ¹⁾	CMAF 06 CS29	29	MMAP 06 CS40	40				
with pegs and aluminum cover, high construction ¹⁾	CMAF 06CS229	29 x 2	MMAP 06CS240	40 x 2				
with pegs and plastic cover ¹⁾	CMP 06 CP	21	MMP 06 CP25	25				
with pegs and plastic cover ¹⁾	CMP 06 CP2	21 x 2	MMP 06 CP225	25 x 2				
with pegs and plastic cover, high construction ¹⁾	CMAF 06 CP	21	MMAP 06 CP32	32				
with pegs and plastic cover, high construction ¹⁾	CMAF 06 CP2	21 x 2	MMAP 06CP232	32 x 2				
with pegs and plastic cover, high construction ¹⁾	CMAF 06 CP29	29	MMAP 06 CP40	40				
with pegs and plastic cover, high construction ¹⁾	CMAF 06CP229	29 x 2	MMAP 06CP240	40 x 2				
with lever and cover					CMP 06 LS	21	MMP 06 LS25	25
with lever and cover					CMP 06 LS2	21 x 2	MMP 06 LS225	25 x 2
with lever and cover, high construction					CMAF 06 LS	21	MMAP 06 LS32	32
with lever and cover, high construction					CMAF 06 LS2	21 x 2	MMAP 06LS232	32 x 2
with lever and cover, high construction					CMAF 06 LS29	29	MMAP 06 LS40	40
with lever and cover, high construction					CMAF 06LS229	29 x 2	MMAP 06LS240	40 x 2

¹⁾ may be combined with enclosures:
- CMO/CMAO 06 X and CMV/CMAV 06 X
- MMO/MMAO 06 X and MMV/MMAV 06 X


NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.
The door (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

dimensions in mm

CMP - CMAF and MMP - MMAP

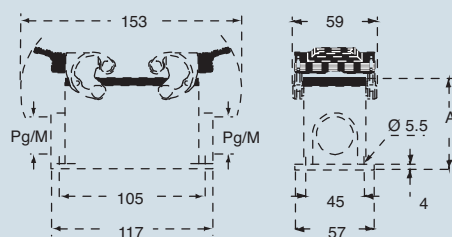


CMP CS/CP - CMAF CS/CP and MMP CS/CP - MMAP CS/CP

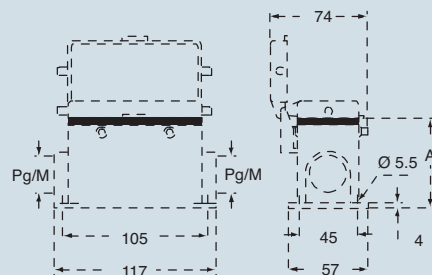


type	A
CMP / MMP	63
CMAF / MMAP	81
CMP CS / MMP CS	63
CMAF CS / MMAP CS	81
CMP CP / MMP CP	63
CMAF CP / MMAP CP	81

dimensions in mm

CMP L - CMAF L and MMP L - MMAP L

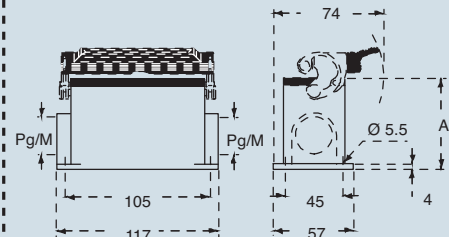

CMP LS - CMAF LS and MMP LS - MMAP LS

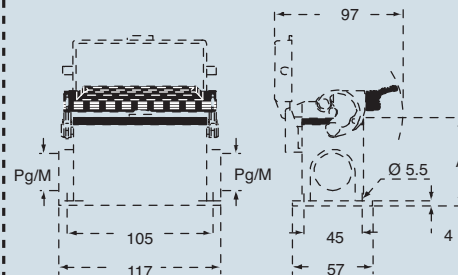

type	A
CMP L / MMP L	63
CMAF L / MMAP L	81
CMP LS / MMP LS	63
CMAF LS / MMAP LS	81

CAVUS Type
4/4X/12

(excluding enclosures with plastic cover)



dimensions shown are not binding
and may be changed without notice

inserts: page
CME 6+2 (aux) poles + ⊕ 137

insert centre distance:
77.5 x 27 mm

hoods with 4 pegs



hoods with 2 pegs




description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with pegs, side entry	CMO 06	21	MMO 06.25	25	CMO 06 L	21	MMO 06 L25	25
with pegs, side entry			MMO 06.32	32			MMO 06 L32	32
with pegs, side entry, high construction	CMAO 06.21	21	MMAO 06.32	32	CMAO 06 L21	21	MMAO 06 L32	32
with pegs, side entry, high construction	CMAO 06.29	29	MMAO 06.40	40	CMAO 06 L29	29	MMAO 06 L40	40
with pegs, top entry	CMV 06	21	MMV 06.25 **	25	CMV 06 L	21	MMV 06 L25	25
with pegs, top entry			MMV 06.32	32			MMV 06 L32	32
with pegs, top entry, high construction	CMAV 06.21	21	MMAV 06.32	32	CMAV 06 L21	21	MMAV 06 L32	32
with pegs, top entry, high construction	CMAV 06.29	29	MMAV 06.40	40	CMAV 06 L29	29	MMAV 06 L40	40
with pegs, frontal entry, high construction	CMAF 06	21	MMAF 06.25	25				
with pegs, frontal entry, high constr., without adaptor *	CMFF 06	21	MMFF 06.25	25				

* enclosure without adaptor, threaded on the enclosure body, to be used only with a complete cable gland.

** can only be used with a complete cable gland (to be purchased separately)

dimensions in mm


CMO (CMAO) and MMO (MMAO)

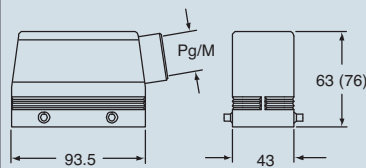

CMV (CMAV) and MMV (MMAV)




CMAF/CMFF and MMAF/MMFF




dimensions in mm

CMO L (CMAO L) and MMO L (MMAO L)

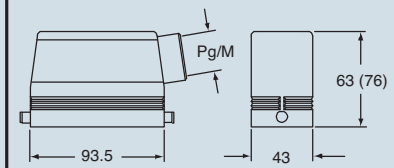

CMV L (CMAV L) and MMV L (MMAV L)

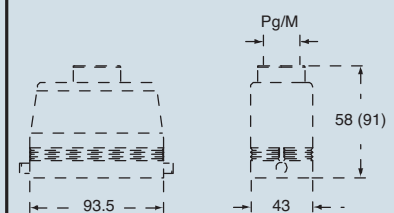

CAVUS Type 4/4X/12



dimensions shown are not binding
and may be changed without notice

inserts: page
CME 6+2 (aux) poles + $\oplus$ 137

insert centre distance:
77.5 x 27 mm

hoods with 2 levers



hoods with 1 lever




description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with levers and gasket, top entry	CMV 06 G	21	MHV 06 G32	32	CMV 06 LG	21	MMV 06 LG32	32
with levers and gasket, top entry, high construction	CMAV 06 G	21	MMAV 06 G25	25	CMAV 06 LG21	21	MMAV 06 LG25	25
with levers and gasket, top entry, high construction	CMAV 06 G29	29	MMAV 06 G32	32	CMAV 06 LG29	29	MMAV 06 LG32	32
with levers and gasket, top entry, high constr., without adapter *	CMFV 06 G	21	MMFV 06 G25	25	CMFV 06 LG21	21	MMFV 06 LG25	25
with levers and gasket, top entry, high constr., without adapter *	CMFV 06 G29	29	MMFV 06 G32	32	CMFV 06 LG29	29	MMFV 06 LG32	32

* enclosure without adaptor, threaded on the enclosure body, to be used only with a complete cable gland.


dimensions in mm

**CMV G (CMAV G) and [CMFV G],
MMV G (MMAV G) and [MMFV G]**

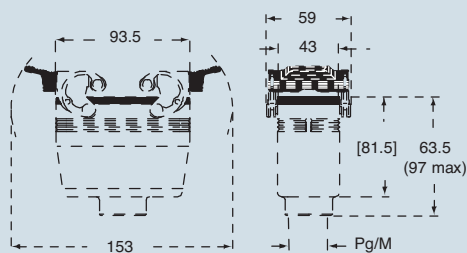

dimensions in mm

**CMV LG (CMAV LG) and [CMFV LG],
MMV LG (MMAV LG) and [MMFV LG]**

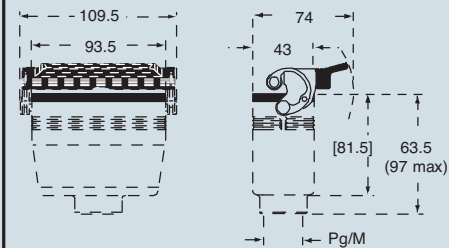

CALUS Type 4/4X/12



dimensions shown are not binding
and may be changed without notice

inserts: page
CME 6+2 (aux) poles + ⊕ 137

insert centre distance:
77.5 x 27 mm

hoods with 2 levers



covers




description	part no.	entry Pg	part no.	entry M	part no.
with levers, side entry ¹⁾	CMO 06 X	21	MMO 06 X25	25	
with levers, side entry ¹⁾			MMO 06 X32	32	
with levers, side entry, high construction ¹⁾	CMAO 06 X	21	MMAO 06 X32	32	
with levers, side entry, high construction ¹⁾	CMAO 06 X29	29	MMAO 06 X40	40	
with levers, top entry ¹⁾	CMV 06 X	21	MMV 06 X25	25	
with levers, top entry ¹⁾			MMV 06 X32	32	
with levers, top entry, high construction ¹⁾	CMAV 06 X	21	MMAV 06 X32	32	
with levers, top entry, high construction ¹⁾	CMAV 06 X29	29	MMAV 06 X40	40	
with 4 pegs (for enclosures with 2 levers with gasket)					CHC 16
with 4 pegs and gasket (for enclosures with 2 levers) ²⁾					CHC 16 C
with 2 pegs (for enclosures with 1 lever with gasket)					CHC 16 L
with 2 levers (for hoods with 4 pegs)					CHC 16 G
with 1 lever (for hoods with 2 pegs)					CHC 16 LG

¹⁾ may be combined with enclosures:
- CMI/CMP/CMAV 06 CS/CP
- MMP/MMAP 06 CS/CP


²⁾ may be combined with enclosures:
- CMO/CMAO 06 X and CMV/CMAV 06 X
- MMO/MMAO 06 X and MMV/MMAV 06 X

dimensions in mm

CMO X (CMAO X) and MMO X (MMAO X)

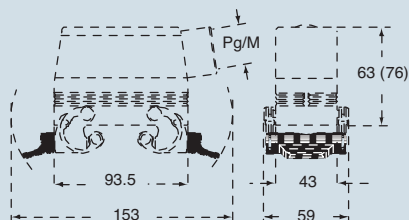


CMV X (CMAV X) and MMV X (MMAV X)

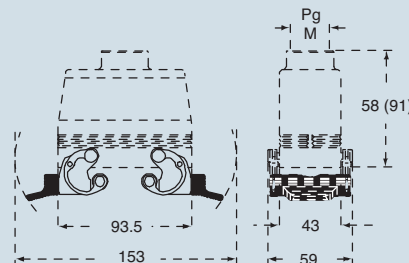


dimensions in mm

CHC




CHC C




CHC L



CHC G



CHC LG



CALUS Type 4/4X/12



dimensions shown are not binding
and may be changed without notice



inserts:	page
CME..... 10+2 (aux) poles + ⊕	139
CME, CMCE 16+2 (aux) poles + ⊕ 145 and 144	

insert centre distance:
104 x 27 mm

bulkhead mounting housings
with 2 levers or 4 pegs




bulkhead mounting housings
with single lever



description	part no.	part no.
with one or two levers	CMI 16	CMI 16 L
with pegs and aluminum cover ¹⁾	CMI 16 CS	
with pegs and plastic cover ¹⁾	CMI 16 CP	
with lever and cover		CMI 16 LS


¹⁾ may be combined with enclosures:
- CMO/CMAO 16 X and CMV/CMAV 16 X
- MMO/MMAO 16 X and MMV/MMAV 16 X
NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.
The door (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

panel cut-out for bulkhead mounting housings in mm

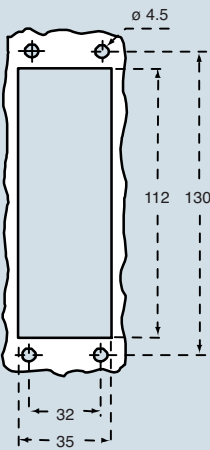


dimensions in mm

CMI

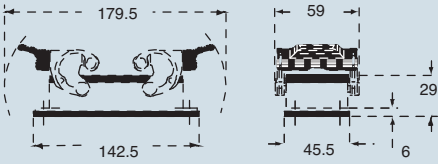


CMI CS/CP

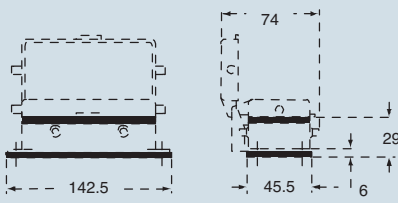


dimensions in mm

CMI L

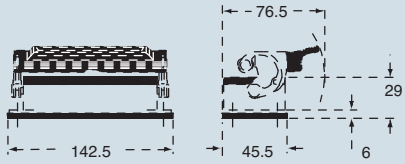

CMI LS

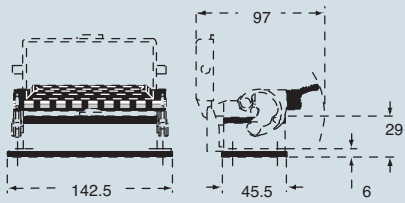

CALUS Type 4/4X/12

(excluding enclosures with plastic cover)



dimensions shown are not binding
and may be changed without notice

inserts: page
CME 10+2 (aux) poles + ⊕ 139
CME, CMCE 16+2 (aux) poles + ⊕ 145 and 144

insert centre distance:
104 x 27 mm

surface mounting housings with 2 levers or 4 pegs



surface mounting housings with single lever




description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with levers	CMP 16	21	MMP 16.25	25	CMP 16 L	21	MMP 16 L25	25
with levers	CMP 16.2	21 x 2	MMP 16.225	25 x 2	CMP 16 L2	21 x 2	MMP 16 L225	25 x 2
with levers, high construction	CMAp 16.21	21	MMAp 16.32	32	CMAp 16 L	21	MMAp 16 L32	32
with levers, high construction	CMAp 16.221	21 x 2	MMAp 16.232	32 x 2	CMAp 16 L2	21 x 2	MMAp 16 L232	32 x 2
with levers, high construction	CMAp 16.29	29	MMAp 16.40	40	CMAp 16 L29	29	MMAp 16 L40	40
with levers, high construction	CMAp 16.229	29 x 2	MMAp 16.240	40 x 2	CMAp 16 L229	29 x 2	MMAp 16 L240	40 x 2
with pegs and aluminum cover ¹⁾	CMP 16 CS	21	MMP 16 CS25	25				
with pegs and aluminum cover ¹⁾	CMP 16 CS2	21 x 2	MMP 16 CS225	25 x 2				
with pegs and aluminum cover, high construction ¹⁾	CMAp 16 CS	21	MMAp 16 CS32	32				
with pegs and aluminum cover, high construction ¹⁾	CMAp 16 CS2	21 x 2	MMAp 16CS232	32 x 2				
with pegs and aluminum cover, high construction ¹⁾	CMAp 16 CS29	29	MMAp 16 CS40	40				
with pegs and aluminum cover, high construction ¹⁾	CMAp 16CS229	29 x 2	MMAp 16CS240	40 x 2				
with pegs and plastic cover ¹⁾	CMP 16 CP	21	MMP 16 CP25	25				
with pegs and plastic cover ¹⁾	CMP 16 CP2	21 x 2	MMP 16 CP225	25 x 2				
with pegs and plastic cover, high construction ¹⁾	CMAp 16 CP	21	MMAp 16 CP32	32				
with pegs and plastic cover, high construction ¹⁾	CMAp 16 CP2	21 x 2	MMAp 16CP232	32 x 2				
with pegs and plastic cover, high construction ¹⁾	CMAp 16 CP29	29	MMAp 16 CP40	40				
with pegs and plastic cover, high construction ¹⁾	CMAp 16CP229	29 x 2	MMAp 16CP240	40 x 2				
with lever and cover					CMP 16 LS	21	MMP 16 LS25	25
with lever and cover					CMP 16 LS2	21 x 2	MMP 16 LS225	25 x 2
with lever and cover, high construction					CMAp 16 LS	21	MMAp 16 LS32	32
with lever and cover, high construction					CMAp 16 LS2	21 x 2	MMAp 16LS232	32 x 2
with lever and cover, high construction					CMAp 16 LS29	29	MMAp 16 LS40	40
with lever and cover, high construction					CMAp 16LS229	29 x 2	MMAp 16LS240	40 x 2

¹⁾ may be combined with enclosures:
 - CMO/CMAO 16 X and CMV/CMAV 16 X
 - MMO/MMAO 16 X and MMV/MMAV 16 X


NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.
 The door (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

dimensions in mm

CMP - CMAp and MMP - MMAp

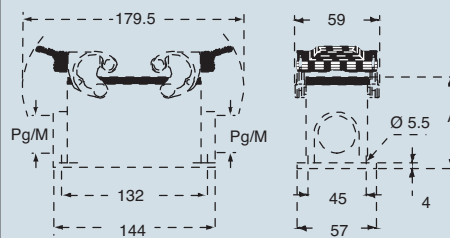


CMP CS/CP - CMAp CS/CP and MMP CS/CP - MMAp CS/CP

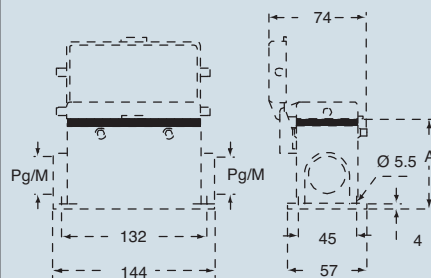


type	A
CMP / MMP	63
CMAp / MMAp	81
CMP CS / MMP CS	63
CMAp CS / MMAp CS	81
CMP CP / MMP CP	63
CMAp CP / MMAp CP	81

dimensions in mm

CMP L - CMAp L and MMP L - MMAp L

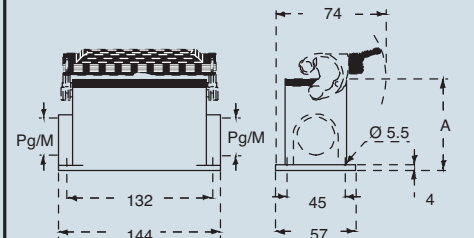

CMP LS - CMAp LS and MMP LS - MMAp LS

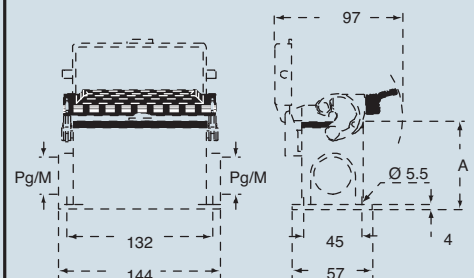

type	A
CMP L / MMP L	63
CMAp L / MMAp L	81
CMP LS / MMP LS	63
CMAp LS / MMAp LS	81

CAVUS Type 4/4X/12

(excluding enclosures with plastic cover)



dimensions shown are not binding
 and may be changed without notice

inserts: page

CME 10+2 (aux) poles + ⊕ 139
CME, CMCE 16+2 (aux) poles + ⊕ 145 and 144

insert centre distance:
104 x 27 mm

hoods with 4 pegs



hoods with 2 pegs




description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with pegs, side entry	CMO 16	21	MMO 16.25	25	CMO 16 L	21	MMO 16 L25	25
with pegs, side entry			MMO 16.32	32			MMO 16 L32	32
with pegs, side entry, high construction	CMAO 16.21	21	MMAO 16.32	32	CMAO 16 L21	21	MMAO 16 L32	32
with pegs, side entry, high construction	CMAO 16.29	29	MMAO 16.40	40	CMAO 16 L29	29	MMAO 16 L40	40
with pegs, top entry	CMV 16	21	MMV 16.25 **	25	CMV 16 L	21	MMV 16 L25	25
with pegs, top entry			MMV 16.32	32			MMV 16 L32	32
with pegs, top entry	CMV 16.29	29	MMV 16.40	40	CMV 16 L29	29	MMV 16 L40	40
with pegs, top entry, high construction	CMAV 16.21	21	MMAV 16.32	32	CMAV 16 L21	21	MMAV 16 L32	32
with pegs, top entry, high construction	CMAV 16.29	29	MMAV 16.40	40	CMAV 16 L29	29	MMAV 16 L40	40
with pegs, frontal entry, high construction	CMAF 16.21	21	MMAF 16.25	25				
with pegs, frontal entry, high construction	CMAF 16.29	29	MMAF 16.32	32				
with pegs, frontal entry, high constr., without adaptor *	CMFF 16.21	21	MMFF 16.25	25				
with pegs, frontal entry, high constr., without adaptor *	CMFF 16.29	29	MMFF 16.32	32				

* enclosure without adaptor, threaded on the enclosure body, to be used only with a complete cable gland.


** can only be used with a complete cable gland (to be purchased separately)

dimensions in mm

CMO (CMAO) and MMO (MMAO)

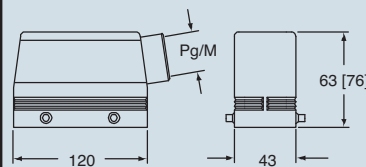


CMV (CMAV) and MMV (MMAV)

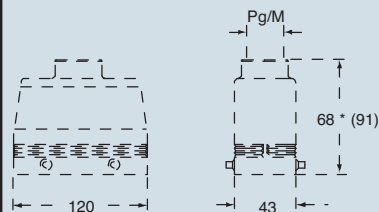


* 69.5 for Pg 29 - M 40 versions

CMAF/CMFF and MMAF/MMFF

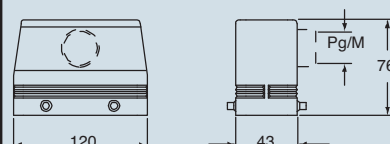

dimensions in mm

CMO L (CMAO L) and MMO L (MMAO L)

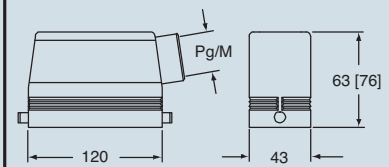

CMV L (CMAV L) and MMV L (MMAV L)



* 69.5 for Pg 29 - M 40 versions

CALUS Type 4/4X/12



dimensions shown are not binding and may be changed without notice



inserts:	page
CME 10+2 (aux) poles + ⊕	139
CME, CMCE 16+2 (aux) poles + ⊕ 145 and 144	

insert centre distance:
104 x 27 mm

hoods with 2 levers



hoods with 1 lever




description	hoods with 2 levers		hoods with 1 lever	
	part no.	entry Pg	part no.	entry M
with levers and gasket, top entry	CMV 16 G	21	MHV 16 G32	32
with levers and gasket, top entry, high construction	CMAV 16 G	21	MMAV 16 G25	25
with levers and gasket, top entry, high construction	CMAV 16 G29	29	MMAV 16 G32	32
with levers and gasket, top entry, high, without adapter *	CMFV 16 G	21	MMFV 16 G25	25
with levers and gasket, top entry, high, without adapter *	CMFV 16 G29	29	MMFV 16 G32	32

* enclosure without adaptor, threaded on the enclosure body, to be used only with a complete cable gland.


dimensions in mm

CMV G (CMAV G) and [CMFV G],
MMV G (MMAV G) and [MMFV G]

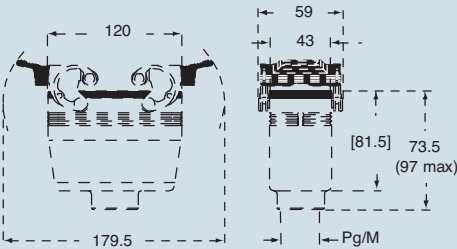

dimensions in mm

CMV LG (CMAV LG) and [CMFV LG],
MMV LG (MMAV LG) and [MMFV LG]

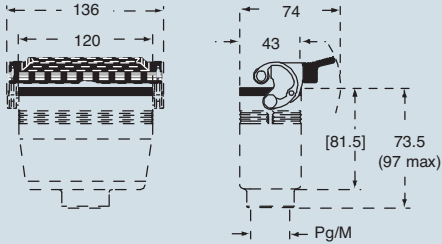

CALUS Type 4/4X/12



dimensions shown are not binding
and may be changed without notice


inserts: page
CME..... 10+2 (aux) poles + ⊕ 139
CME, CMCE..... 16+2 (aux) poles + ⊕ 145 and 144

insert centre distance:
104 x 27 mm

hoods with 2 levers



covers

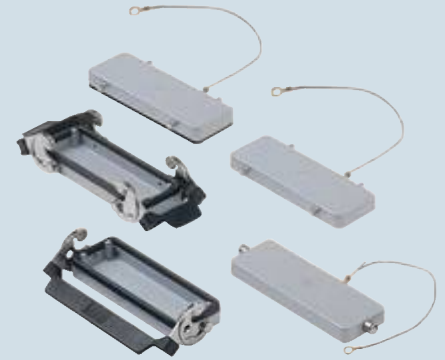


description	part no.	entry Pg	part no.	entry M	part no.
with levers, side entry ¹⁾	CMO 16 X	21	MMO 16 X25	25	
with levers, side entry ¹⁾			MMO 16 X32	32	
with levers, side entry, high construction ¹⁾	CMAO 16 X	21	MMAO 16 X32	32	
with levers, side entry, high construction ¹⁾	CMAO 16 X29	29	MMAO 16 X40	40	
with levers, top entry ¹⁾	CMV 16 X	21	MMV 16 X25	25	
with levers, top entry ¹⁾			MMV 16 X32	32	
with levers, top entry, high construction ¹⁾	CMAV 16 X	21	MMAV 16 X32	32	
with levers, top entry, high construction ¹⁾	CMAV 16 X29	29	MMAV 16 X40	40	
with 4 pegs (for enclosures with 2 levers with gasket)					CHC 24
with 4 pegs and gasket (for enclosures with 2 levers) ²⁾					CHC 24 C
with 2 pegs (for enclosures with 1 lever with gasket)					CHC 24 L
with 2 levers (for hoods with 4 pegs)					CHC 24 G
with 1 lever (for hoods with 2 pegs)					CHC 24 LG

¹⁾ may be combined with enclosures:
 - CMI/CMP/CMAV 16 CS
 - MMP/MMAV 16 CS


²⁾ may be combined with enclosures:
 - CMO/CMAO 16 X and CMV/CMAV 16 X
 - MMO/MMAO 16 X and MMV/MMAV 16 X

dimensions in mm

CMO X (CMAO X) and MMO X (MMAO X)

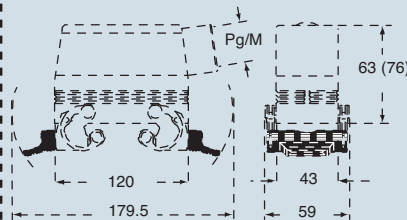


CMV X (CMAV X) and MMV X (MMAV X)

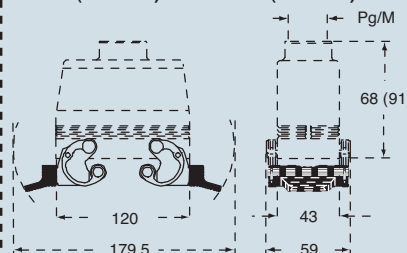


dimensions in mm


CHC




CHC C




CHC L



CHC G



CHC LG



CU® Type
 4/4X/12



dimensions shown are not binding
 and may be changed without notice