


for insert series:

page:


CD	(10A)	45-53 *
CDD	(10A)	59-66 *
CQ	(10A)	69-70 *
CX 8/24	(16A/10A)	151 *
CX 6/36	(10A)	152 *
CX 12/2	(10A)	153 *
MIXO	(10A)	172-184 *

* refer to catalogue page CN.12

10A crimp contacts
special gold plating 2 µm



10A crimp contacts
JEI® gold plating




description	part No.	part No.
<p>10A female contacts</p> <p>0.14-0.37 mm² AWG 26-22 identification No. 1</p> <p>0.5 mm² AWG 20 identification No. 2</p> <p>0.75 mm² AWG 18 identification No. ②</p> <p>1.0 mm² AWG 18 identification No. 3</p> <p>1.5 mm² AWG 16 identification No. 4</p> <p>2.5 mm² AWG 14 identification No. 5</p> <p>10A male contacts</p> <p>0.14-0.37 mm² AWG 26-22 identification No. 1</p> <p>0.5 mm² AWG 20 identification No. 2</p> <p>0.75 mm² AWG 18 identification No. ②</p> <p>1.0 mm² AWG 18 identification No. 3</p> <p>1.5 mm² AWG 16 identification No. 4</p> <p>2.5 mm² AWG 14 identification No. 5</p>	<p>CDFD 0.3-2</p> <p>CDFD 0.5-2</p> <p>CDFD 0.7-2</p> <p>CDFD 1.0-2</p> <p>CDFD 1.5-2</p> <p>CDFD 2.5-2</p> <p style="background-color: red; color: white; text-align: center; font-weight: bold;">gold plated</p>	<p>CDFD 0.3-J</p> <p>CDFD 0.5-J</p> <p>CDFD 0.7-J</p> <p>CDFD 1.0-J</p> <p>CDFD 1.5-J</p> <p>CDFD 2.5-J</p> <p style="background-color: red; color: white; text-align: center; font-weight: bold;">gold plated</p> <p>CDMD 0.3-J</p> <p>CDMD 0.5-J</p> <p>CDMD 0.7-J</p> <p>CDMD 1.0-J</p> <p>CDMD 1.5-J</p> <p>CDMD 2.5-J</p>

The new gold plated contacts provide:

- corrosion resistance (according to EN 60068)
- mechanical life: ≥ 500 coupling cycles
- in compliance with EN 61984:2010-4, IEC 60512, IEC 60999-1:1999-11, EN 60352-2: 1994
- compliant to directive RoHS
- contact resistance: ≤ 3 mΩ


dimensions in mm



contacts CDF 2 and CDM 2

conductor section	conductor slot	conductors stripping length
mm ²	ø A (mm)	B (mm)
0.14-0,37	0.9	8
0.5	1.1	8
0.75	1.3	8
1.0	1.45	8
1.5	1.8	8
2.5	2.2	6

dimensions in mm



contacts CDF J and CDM J

conductor section	conductor slot	conductors stripping length
mm ²	ø A (mm)	B (mm)
0.14-0,37	0.9	8
0.5	1.1	8
0.75	1.3	8
1.0	1.45	8
1.5	1.8	8
2.5	2.2	6

dimensions shown are not binding and may be changed without notice

for insert series:

page:

CDC	(16A)	73-77 *
CQ	(16A)	69-70 *
CQE	(16A)	80-85 *
CCE	(16A)	94-104 *
CMCE	(16A)	134-146 *
CX 8/24	(16A/10A)	151 *
MIXO	(16A)	172-184 *

* refer to catalogue page CN.12

16A crimp contacts
special gold plating 2 µm



16A crimp contacts
JEI® gold plating




description	part No.	part No.																																																																																				
<p>16A female contacts</p> <table border="0"> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>one groove</td> <td>CCFD 0.3-2</td> <td rowspan="10" style="background-color: red; color: white; text-align: center; vertical-align: middle;">gold plated</td> <td>CCFD 0.3-J</td> <td rowspan="10" style="background-color: red; color: white; text-align: center; vertical-align: middle;">gold plated</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>with no grooves</td> <td>CCFD 0.5-2</td> <td>CCFD 0.5-J</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>one groove (back side)</td> <td>CCFD 0.7-2</td> <td>CCFD 0.7-J</td> </tr> <tr> <td>1.0 mm²</td> <td>AWG 18</td> <td>one groove</td> <td>CCFD 1.0-2</td> <td>CCFD 1.0-J</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>two grooves</td> <td>CCFD 1.5-2</td> <td>CCFD 1.5-J</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>three grooves</td> <td>CCFD 2.5-2</td> <td>CCFD 2.5-J</td> </tr> <tr> <td>3.0 mm²</td> <td>AWG 12</td> <td>one wide groove</td> <td>CCFD 3.0-2</td> <td>CCFD 3.0-J</td> </tr> <tr> <td>4.0 mm²</td> <td>AWG 12</td> <td>with no grooves</td> <td>CCFD 4.0-2</td> <td>CCFD 4.0-J</td> </tr> </table> <p>16A male contacts</p> <table border="0"> <tr> <td>0.14-0.37 mm²</td> <td>AWG 26-22</td> <td>one groove</td> <td>CCMD 0.3-2</td> <td rowspan="10" style="background-color: red; color: white; text-align: center; vertical-align: middle;">gold plated</td> <td>CCMD 0.3-J</td> <td rowspan="10" style="background-color: red; color: white; text-align: center; vertical-align: middle;">gold plated</td> </tr> <tr> <td>0.5 mm²</td> <td>AWG 20</td> <td>with no grooves</td> <td>CCMD 0.5-2</td> <td>CCMD 0.5-J</td> </tr> <tr> <td>0.75 mm²</td> <td>AWG 18</td> <td>one groove (back side)</td> <td>CCMD 0.7-2</td> <td>CCMD 0.7-J</td> </tr> <tr> <td>1.0 mm²</td> <td>AWG 18</td> <td>one groove</td> <td>CCMD 1.0-2</td> <td>CCMD 1.0-J</td> </tr> <tr> <td>1.5 mm²</td> <td>AWG 16</td> <td>two grooves</td> <td>CCMD 1.5-2</td> <td>CCMD 1.5-J</td> </tr> <tr> <td>2.5 mm²</td> <td>AWG 14</td> <td>three grooves</td> <td>CCMD 2.5-2</td> <td>CCMD 2.5-J</td> </tr> <tr> <td>3.0 mm²</td> <td>AWG 12</td> <td>one wide groove</td> <td>CCMD 3.0-2</td> <td>CCMD 3.0-J</td> </tr> <tr> <td>4.0 mm²</td> <td>AWG 12</td> <td>with no grooves</td> <td>CCMD 4.0-2</td> <td>CCMD 4.0-J</td> </tr> </table>	0.14-0.37 mm ²	AWG 26-22	one groove	CCFD 0.3-2	gold plated	CCFD 0.3-J	gold plated	0.5 mm ²	AWG 20	with no grooves	CCFD 0.5-2	CCFD 0.5-J	0.75 mm ²	AWG 18	one groove (back side)	CCFD 0.7-2	CCFD 0.7-J	1.0 mm ²	AWG 18	one groove	CCFD 1.0-2	CCFD 1.0-J	1.5 mm ²	AWG 16	two grooves	CCFD 1.5-2	CCFD 1.5-J	2.5 mm ²	AWG 14	three grooves	CCFD 2.5-2	CCFD 2.5-J	3.0 mm ²	AWG 12	one wide groove	CCFD 3.0-2	CCFD 3.0-J	4.0 mm ²	AWG 12	with no grooves	CCFD 4.0-2	CCFD 4.0-J	0.14-0.37 mm ²	AWG 26-22	one groove	CCMD 0.3-2	gold plated	CCMD 0.3-J	gold plated	0.5 mm ²	AWG 20	with no grooves	CCMD 0.5-2	CCMD 0.5-J	0.75 mm ²	AWG 18	one groove (back side)	CCMD 0.7-2	CCMD 0.7-J	1.0 mm ²	AWG 18	one groove	CCMD 1.0-2	CCMD 1.0-J	1.5 mm ²	AWG 16	two grooves	CCMD 1.5-2	CCMD 1.5-J	2.5 mm ²	AWG 14	three grooves	CCMD 2.5-2	CCMD 2.5-J	3.0 mm ²	AWG 12	one wide groove	CCMD 3.0-2	CCMD 3.0-J	4.0 mm ²	AWG 12	with no grooves	CCMD 4.0-2	CCMD 4.0-J		
0.14-0.37 mm ²	AWG 26-22	one groove	CCFD 0.3-2	gold plated		CCFD 0.3-J		gold plated																																																																														
0.5 mm ²	AWG 20	with no grooves	CCFD 0.5-2			CCFD 0.5-J																																																																																
0.75 mm ²	AWG 18	one groove (back side)	CCFD 0.7-2			CCFD 0.7-J																																																																																
1.0 mm ²	AWG 18	one groove	CCFD 1.0-2			CCFD 1.0-J																																																																																
1.5 mm ²	AWG 16	two grooves	CCFD 1.5-2			CCFD 1.5-J																																																																																
2.5 mm ²	AWG 14	three grooves	CCFD 2.5-2			CCFD 2.5-J																																																																																
3.0 mm ²	AWG 12	one wide groove	CCFD 3.0-2			CCFD 3.0-J																																																																																
4.0 mm ²	AWG 12	with no grooves	CCFD 4.0-2			CCFD 4.0-J																																																																																
0.14-0.37 mm ²	AWG 26-22	one groove	CCMD 0.3-2			gold plated			CCMD 0.3-J	gold plated																																																																												
0.5 mm ²	AWG 20	with no grooves	CCMD 0.5-2		CCMD 0.5-J																																																																																	
0.75 mm ²	AWG 18	one groove (back side)	CCMD 0.7-2	CCMD 0.7-J																																																																																		
1.0 mm ²	AWG 18	one groove	CCMD 1.0-2	CCMD 1.0-J																																																																																		
1.5 mm ²	AWG 16	two grooves	CCMD 1.5-2	CCMD 1.5-J																																																																																		
2.5 mm ²	AWG 14	three grooves	CCMD 2.5-2	CCMD 2.5-J																																																																																		
3.0 mm ²	AWG 12	one wide groove	CCMD 3.0-2	CCMD 3.0-J																																																																																		
4.0 mm ²	AWG 12	with no grooves	CCMD 4.0-2	CCMD 4.0-J																																																																																		

The new gold plated contacts provide:

- corrosion resistance (according to EN 60068)
- mechanical life: ≥ 500 coupling cycles
- in compliance with EN 61984:2010-4, IEC 60512, IEC 60999-1:1999-11, EN 60352-2: 1994
- compliant to directive RoHS
- contact resistance: ≤ 1 mΩ


dimensions in mm

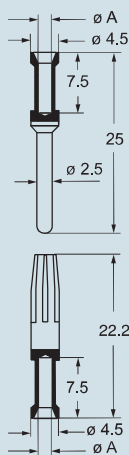

contacts CCF 2 and CCM 2

conductor section mm ²	conductor slot ø A (mm)	conductors stripping length B (mm)
0.14-0.37	0.9	7.5
0.5	1.1	7.5
0.75	1.3	7.5
1.0	1.45	7.5
1.5	1.8	7.5
2.5	2.2	7.5
3.0	2.55	7.5
4.0	2.85	7.5

dimensions in mm

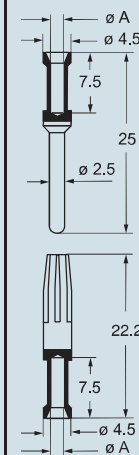

contacts CCF J and CCM J

conductor section mm ²	conductor slot ø A (mm)	conductors stripping length B (mm)
0.14-0.37	0.9	7.5
0.5	1.1	7.5
0.75	1.3	7.5
1.0	1.45	7.5
1.5	1.8	7.5
2.5	2.2	7.5
3.0	2.55	7.5
4.0	2.85	7.5

dimensions shown are not binding and may be changed without notice